


Tooling NO.  
HPDB68:

REVISIONS			
DATE	LTR	DESCRIPTION	APVD.

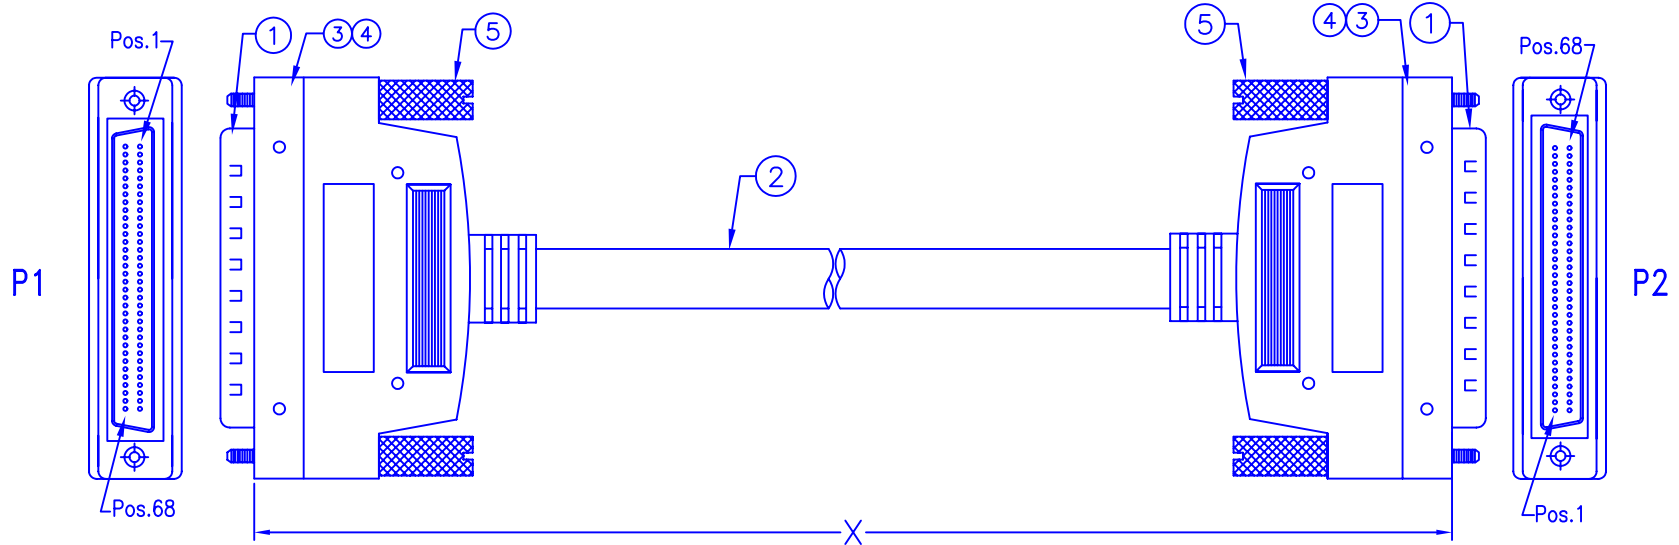

**PIN ASSIGNMENT:**

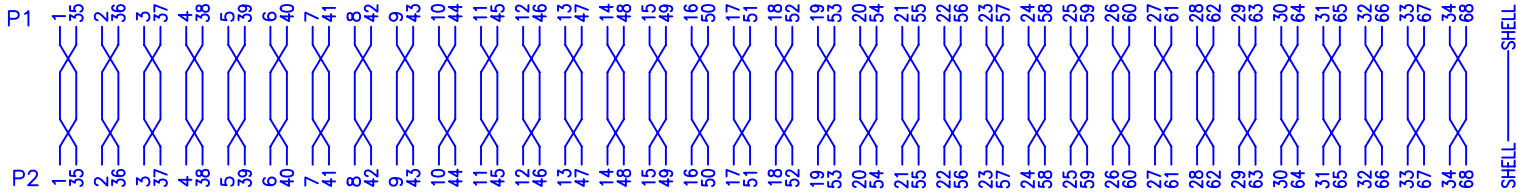


TABLE		
Part No	Item No	Length(X)
436-5042	C44441680033M-02	1000±25
436-5187	C44441680100M-02	3000±50

5	4	EA	MSM2P628440NIP0002	M2.6 All Metal Thumbscrew.
4	MM	SFC3010001		Copper Foil 360° Soldered
3	KG	DVINO40BG001		Molded PVC Color: Beige(BG01).
2	1	EA	W299028BG34PB000XM01	UL2990 28AWG 34TW/PR,Al/Mylar+Drain +Braid, Color: Beige(BG01).
1	2	EA	CHPDB068MBK10U000004	HPDB68 Male,Pitch 1.27mm,Gold Plated, Shell: Nickel Plated,Insulation:Black,PBT UL94V-0
ITEM	QTY	U/M	PART NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED  
TOLERANCE :  
X. ±0.2 ANGLES : ±2°  
X.X ±0.1  
X.XX ±0.05 DO NOT SCALE DRAWING

DRAWN BY  
**ENWEN**  
CHECKED BY  
APPROVED BY  
DWG NO.

TITLE  
**SCSI III HPDB68M/M CABLES**  
SIZE A  
SCALE **0.95:1**  
MI  
THIRD ANGLE PROJECTION  
ITEM NO. **C4444168xxxxM-02**  
REV. **A**  
PAGE **1** OF **2**  
DATE **05/09/2002**