




ENGLISH

Datasheet

RS PRO SLIM FRONT MOUNTING USB2.0 A-A FT CONNECTOR

Stock No: 2188307, 2188308

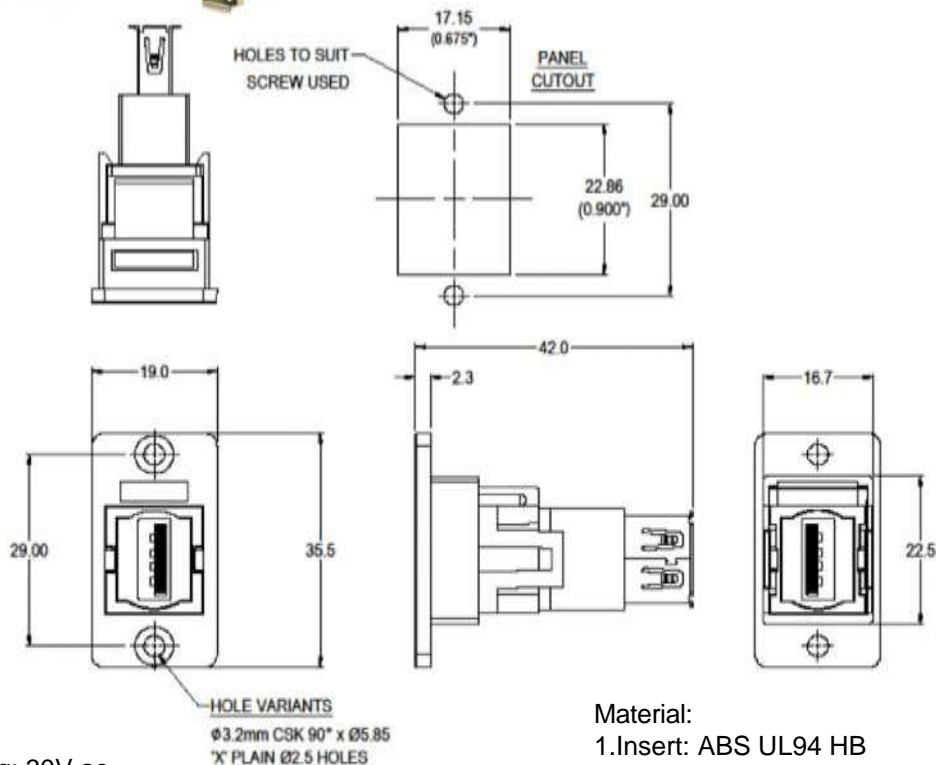

Notes::

- 1.Voltage rating: 30V ac
- 2.Current rating: 1.5 A max
- 3.Contact resistance: 50m Ω max
- 4.Insulation resistance: 20M Ω min
- 5.Dielectric withstanding voltage: 500V AC
- 6.Operating Temperature: -20°C to 50°C

rspro.com

Material:

- 1.Insert: ABS UL94 HB
- 2.Frame: Polyamide UL94 V-2
- 3.Inner Overmouldings: PE + PVC
- 4.Shell: Nickel plated steel
- 5.Contacts: Gold Plated

Features & Benefits:

- Fits standard rectangular cutout.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Other models available:

Part No.

2188307 **FM SLIM FT USB2.0 A-A Black plastic frame, CSK holes**

2188308 **FM SLIM FT USB2.0 A-A Black plastic frame, Ø2.5 PLAIN holes**



rspro.com

