

The logo for tzplus, featuring the letters 'tz' in white and 'plus' in yellow, with a registered trademark symbol (®) to the right. The logo is centered within a diamond-shaped graphic that has a faceted, crystalline appearance with various shades of gray and black.

Find your machine KEY solution

# TZPLUS®

Find your machine KEY solution




Can't find the **size** you need.  
Give us a call today.

STANDARD  
DIN 6885, ISO 2491/773, JIS B 1301-1996

**KTF SERIES  
STOCK KEY**

Made to DIN6885B standard  
with tolerance h9, h11.  
Typical length 300mm, 350mm.  
Surface finish plain  
Economical choice

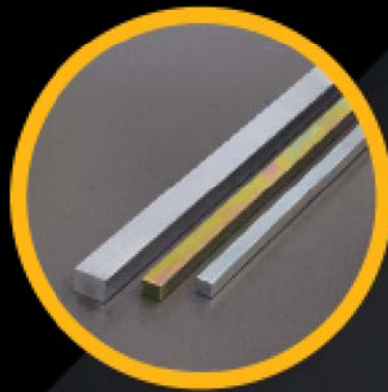

**WFA SERIES  
WOODRUFF KEY**

Made to DIN6888 /  
ISO 3912 standard  
Tolerance h9, h11, h12  
Surface treated to Black Oxide  
or Plain



**KTD SERIES  
DOUBLE ROUND KEY**

Made to DIN6885A standard  
Tolerance h9, h11  
From length 8mm to 200mm  
Surface treated to Black Oxide  
or Plain



**GH SERIES  
GIB HEAD KEY**

Made to DIN 6887 /  
ISO 2492 (metric)  
Taper 1 in 100  
Tolerance h9  
Surface treated to Black Oxide  
or Plain



**KTS SERIES  
SINGLE ROUND KEY**

Made to DIN6885C standard  
Tolerance h9, h11  
From length 8mm to 200mm  
Surface treated to Black Oxide  
or Plain




**FR SERIES  
FEATHER KEY**

Made in accordance to drawing  
Tolerance h9  
Surface treated to Black Oxide  
or Plain



**KTF SERIES  
BOTH END FLAT**

Made to DIN6885B standard  
Tolerance h9, h11  
From length 8mm to 200mm  
Surface treated to Black Oxide  
or Plain

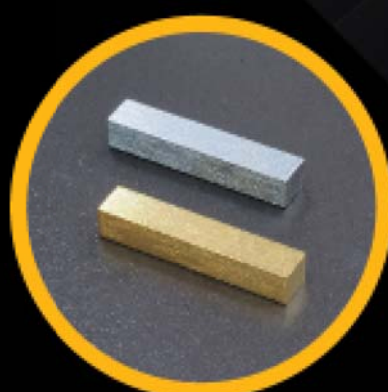


**KN SERIES  
KENNEDY KEY**


Usually used in heavy duty  
applications  
Made in accordance to drawing  
Surface treated to Black Oxide  
or Plain




**Order Example**

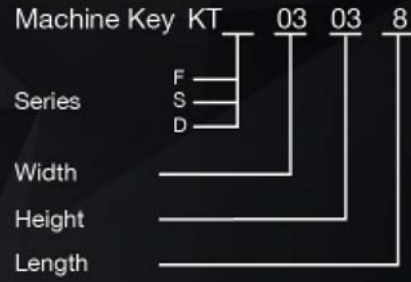


**KTF SERIES**

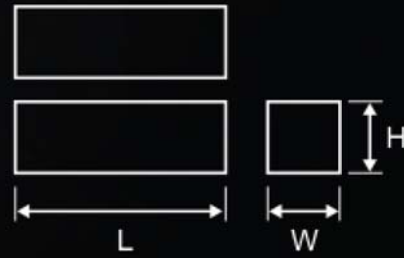

**KTS SERIES**

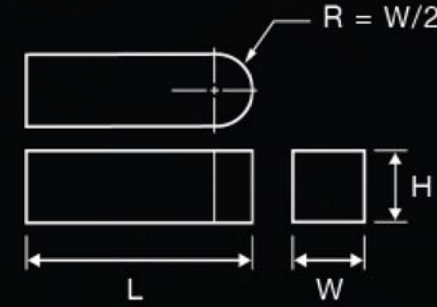

**KTD SERIES**

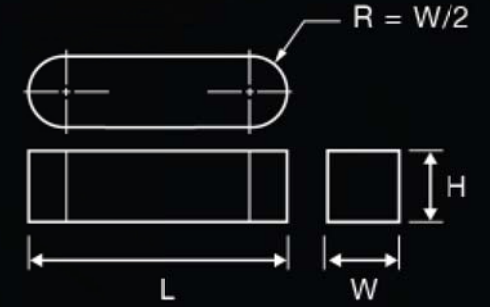

TYPE	W x H	LENGTH														
<b>KTF</b> (both end flat)	2 x 2	6	8	10	12	15	16	18	20	28	30	35	40	45	50 ~ 300	
	3 x 3	6	8	10	12	15	16	18	20	28	30	35	40	45	50 ~ 300	
<b>KTS</b> (one end flat)	4 x 4	6	8	10	12	15	16	18	20	28	30	35	40	45	50 ~ 300	
	5 x 5	6	8	10	15	20	25	30	35	28	30	35	40	45	50 ~ 300	
<b>KTD</b> (both end round)	6 x 6	6	8	10	15	20	25	30	35	28	30	35	40	45	50 ~ 300	
	7 x 7	6	8	10	15	20	25	30	35	28	30	35	40	45	50 ~ 300	

For other sizes, contact us.

Material	S45C, SUS304/316, SCM435
Dimension	Millimeters / Inches
Tolerance	W:h9, H:h11
Standards	DIN 6885, ISO 2491/773, JIS B 1301-1996
Tensile strength	Minimum 60kg/mm <sup>2</sup>
Surface	Black Oxide   Untreated


**Order Example**




TYPE	b x d2	DIMENSION															
<b>WFA</b>	b	2	2.5	2	2.5	3	3	3	4	4	4	5	5	5	6	6	6~ 20
	d2	8	8	10	10	10	13	16	13	16	19	16	19	22	22	25	28 ~100

For other sizes, contact us.

Material	S45C, SUS304/316, SCM435
Dimension	Millimeters / Inches
Tolerance	b:h9, h:h11, c2:h12
Standards	DIN 6888, ISO 3912
Tensile strength	Minimum 60kg/mm <sup>2</sup>
Surface	Black Oxide   Untreated

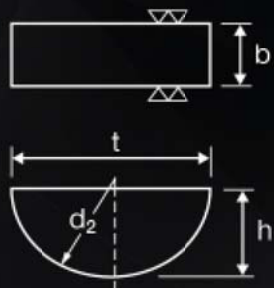

**WFA SERIES**

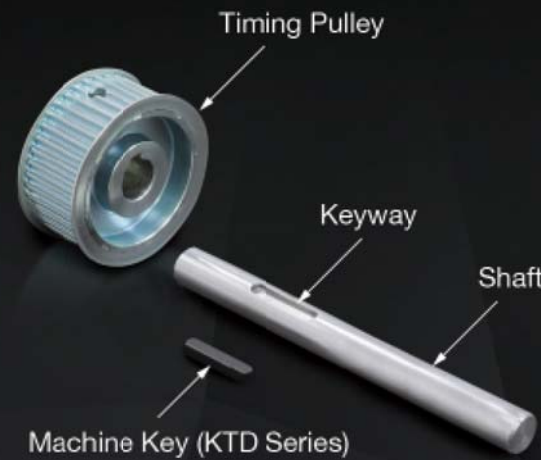

Easy storage and cost effective.  
Ask for our Machine Key box set.

**MADE-TO-ORDER**



You Design • We Make

# BORE HOLE MACHINE KEY



Added tap hole  
for easy removal.

Secure using set screws.

Reuse maybe possible.

Custom your MACHINE KEY.

Machine to precision in accordance to your specifications.

Quality check for reliability assurance.

Contact our authorised dealer today.

## TZPLUS®

Find your machine KEY solution

Contact us today.

**Sales Office** 9 Pioneer Road North #01-55 Singapore 628461

**T** +65 6570 1511 | **F** +65 6570 1611

**E** sales@tzplus.com



All rights reserved 2019

Trade Mark Number 40201801428U

TZPLUS is the original registered trademark

**Zero MOQ**

**Standard Black Oxide**  
Surface Treated (except 300mm)

**LARGE Inventory**

**Made to Order**  
We machine for you

**Quality Assured**  
DIN6885, JIS B 1301-1996