



General Specifications

Doc. Ref:	P100-1002-X66	Rechargeable Li-ion Battery Pack Model Li202SX-6600, 3P3S, 6600mAh	Rev.	1.4
Date	May 15, 2013		Page	Sheet 1 of 4

(Confidential document)

This is a confidential document and the recipient(s) are required to protect the confidentiality of this document and its contents. Document is for the use of intended recipients only and unauthorized access to this document or data, including reproduction or copying is not allowed without written permission from Emerging Power, Inc. Do not alter, change, add, remove, copy, reproduce or modify this document.

Li202SX-6600

**Rechargeable Li-Ion Battery Pack
Model : Li202SX-6600, 10.8V, 6600mAh**

Emerging Power, Inc.

200 Holt Street, Hackensack, NJ 07601, USA

TEL: (201)441-3590 Fax: (201)441-3592

www.emergingpower.com

ENER1 KOREA, INC.

710-3, Yongtan-Dong , Chung-Ju , Chung-buk , Korea

TEL: 82-43-850-1840 / 82-2-3457-8650 FAX: 82-2-564-3566

www.ener1korea.com



General Specifications

Doc. Ref:	P100-1002-X66	Rechargeable Li-ion Battery Pack Model Li202SX-6600, 3P3S, 6600mAh	Rev.	1.4
Date	May 15, 2013		Page	Sheet 2 of 4

1. Description and model name

1.1 Description	Rechargeable Lithium-ion battery pack
1.2 Battery Cell Configuration	3P-3S

2. Electrical specifications

Item	Specification	Remarks
2.1 Capacity	6600mAh	Nominal (by standard charge and discharge)
	6450mAh	Minimum
2.2 Voltage	10.8V	Nominal
2.3 Charging method	CC-CV	Constant-voltage with limited current
2.4 Charging voltage	12.6±0.05V	
2.5 Charging current	3300mA	Standard
2.6 Charging current cut-off	<330mA	
2.7 Discharging current	1560mA	Standard
	3300mA	Maximum
2.8 Discharge cut-off voltage	9.0V	
2.9 Internal resistance	<300mΩ	
2.10 Operating temperature	0 ~ 40°C	Standard charge
	-20 ~ 55°C	Standard discharge
2.11 Storage temperature	0 ~ 25°C	≤ 1 year
	0 ~ 45°C	≤ 3 months
	0 ~ 60°C	≤ 1 month
2.12 Storage humidity	20 ~ 85% RH	Not condensed
2.13 Smart Module Communication	SMBus	Type
	V1.1	Revision

Doc. Ref:	P100-1002-X66	Rechargeable Li-ion Battery Pack Model Li202SX-6600, 3P3S, 6600mAh	Rev.	1.4
Date	May 15, 2013		Page	Sheet 3 of 4

3. Safety specifications

Item		Specification
3.1 Over charge	Prohibition	13.05±0.15V
	Release	12.15±0.3V
	Delay time	< 1.0s
3.2 Over discharge	Prohibition	7.20±0.24V
	Release	8.10±0.3V
	Delay time	< 1.0s
3.3 Over current	Prohibition	10.0 ~ 16.0A (Depends on cell voltage)
	Release	By charging
3.4 Power dissipation	Operating	< 300µA
	Shut down	< 30µA


4. Physical specifications

Item		Specification
4.1 Dimension	L x W x H	149.0±0.5 x 88.8±0.5 x 19.6±0.3 (mm)
4.2 Terminal (Output)		Power(+), Clock(C), Data(D), Thermistor (T), Power(-)
4.3 Weight		<450g

5. Certifications: UL(E225922)




6. Battery Label

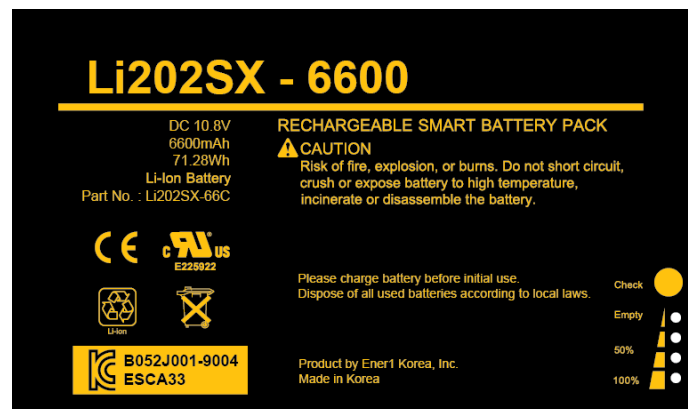

Doc. Ref:	P100-1002-X66	Rechargeable Li-ion Battery Pack Model Li202SX-6600, 3P3S, 6600mAh	Rev.	1.4
Date	May 15, 2013		Page	Sheet 4 of 4

7. Product drawing

This drawing is property of Enertech International, Inc. Use or copy of this drawing without proper permission from the appropriate technical-document managing department is prohibited.

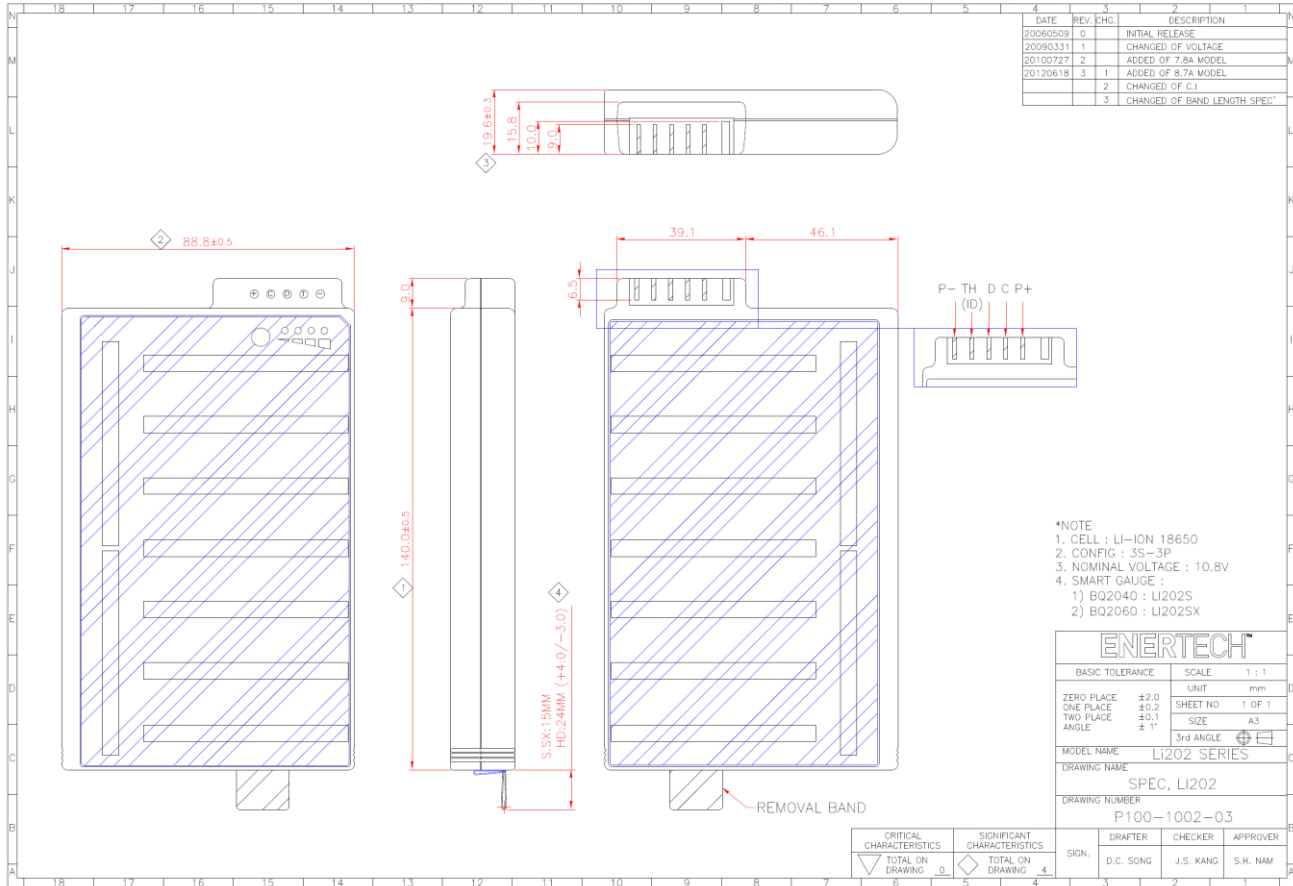

Doc. Ref:	P100-1002-X66	Rechargeable Li-ion Battery Pack Model Li202SX-6600, 3P3S, 6600mAh	Rev.	1.4
Date	May 15, 2013		Page	Sheet 5 of 4

8. Pictures

