

Datasheet

RS PRO LOW NOISE STANDARD MICROPHONE CABLE, 25M

Stock No: 2075329




Technical Specifications:

Conductor	Bare Copper	Ave Thickness(mm)	0.35
Cores Number	1C	Min Thickness(mm)	0.28
Size(mm ²)	0.22	Insulation 1 Dia.(±0.10mm)	2.90
Construction(±0.008mm)	7/0.20	Braiding	Bare Copper
Stranded Dia.(mm)	0.61	Construction(±0.008mm)	16/8/0.10BC
Insulation 1 Material	PE	Braid Coverage(%)	90%
Insulation 1 Color	Natural Color	Jacket Material	PVC
Ave Thickness(mm)	0.79	Jacket Color	Black
Min Thickness(mm)	0.63	Ave Thickness(mm)	0.50
Insulation 1 Dia.(±0.10mm)	2.20	Min Thickness(mm)	0.40
Insulation 2 Material	Semi-conductive PE	Outer Dia(±0.20mm)	4.50
Insulation 2 Color	Black		

Features & Benefits:

- Operating temperature: 80 °C
- Conductor resistance(20°C Ω/km): 86.2max.
- Insulation DC Resistance(20°C MΩ*Km): 200min.
- Operating voltage: 30 V

Cross Section drawings

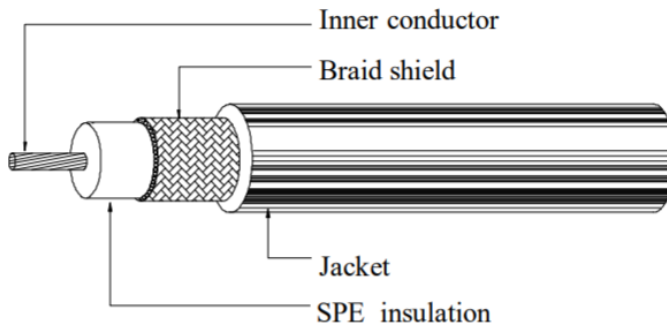

Cable Marking: RS PRO 1 Core×0.22mm²
Microphone Cable 30V

Applications:

For communication and signal control systems.