

Datasheet

RS Pro Cable Clip 17.8mm Black PE

RS Stock No: **184-5220**



Product Details

RS Pro cable clip in black colour, has a maximum bundle diameter of 17.8 mm. The cable cleat is manufactured from low density polyethylene, which has high strength and impact resistance. The material is resistant to corrosion and UV light. It is stable at temperature of -30 to +60°C.


Features and Benefits

- Comes in black colour
- Low density polyethylene (LDPE) construction
- Temperature range from -30 to +60°C

Specifications:

Affixing Method	Screw
Cable Clip/Clamp Style	Cable Clip
Colour	Black
Depth	34 mm
Dimensions [L x W (x D)]	23 x 34 mm
Material	PE
Maximum Bundle Diameter	17.8 mm
Width	23 mm

- MS4 = RS 184-4609
- MS5 = RS 184-5214
- MS6 = RS 184-4615
- MS7 = RS 184-5220
- MS8 = RS 184-4621
- MS9 = RS 184-4637
- MS10 = RS 184-4643

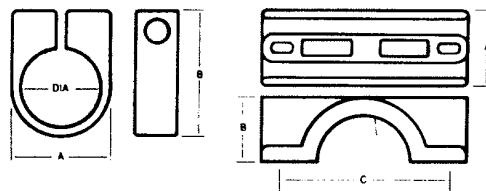

Dimensional Data

Reference Numbers	Dimensions			
	Width A mm	Height B mm	Fixing Centres C mm	Clearance Bolt Holes mm
Standard Polypropylene				
Single Fixing				
MS 5	17.5	28.0	N/A	6
MS 6	20.0	31.0	N/A	6
MS 7	23.0	34.0	N/A	6
MS 8	25.0	38.0	N/A	6
MS 9	28.5	41.0	N/A	6
MS10	30.0	43.5	N/A	6

Size:

MS 7

Qty:

50

Conductor size mm ²	Copper conductor wire armoured Number of cores			Aluminium conductor wire armoured Number of cores			MULTICORE CABLES			
							Conductor size			
				4			1.5mm ²	2.5mm ²	4mm ²	
1.5	5	5	6				5 core	6	7	8
2.5	6	6	6				7 core	6	7	9
4	6	7	7				10 core	8	9	11
6	7	8	8				12 core	8	9	11
10	8	9	9				19 core	9	10	12
16	9	10	11	7	8	9	27 core	10	12	16
25	10	11	12	9	10	12	37 core	12	14	
35	12	12	14	10	10	12	48 core	14	16	
50	7	11	12	14	14	18				
70	8	12	14	16	16	18				
95	9	14	16	18	18	20				
120	10	16	18	20	20	20				
150	11	16	18							
185	12	18								
240	14	20								
300	16									