


Datasheet

Double Level Feed Through Terminal

RS Stock number 872-4798

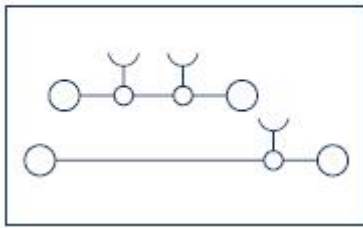

Feed-through terminal
2x2 connections

Specifications

Rated wire cross-section, mm² | AWG: 2.5 | 30-12

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: A3 | V 0

Connection data

Single wire (solid) | stranded, mm²: 0.2-4 | -

Finely-stranded | finely-stranded: 0.2-4 | 0.2-2.5

(w/ferrules DIN 46 228/1), mm²

Contact Wire Range, mm²: 0.2-4

Stripping length, mm: 10

Torque, Nm | Screw: 0.4-0.8 | Slotted M2.5