


## **ENGLISH**

## Datasheet Fibre Optic Cable Assembly

RS Stock number 536-7279



## Dimensions: (mm)

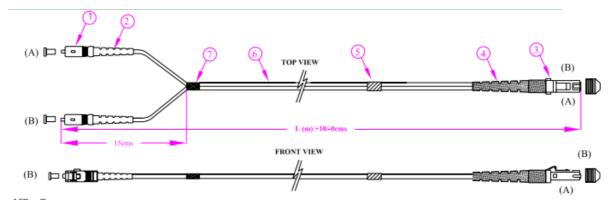

ld No.	Description	EA
1	ST Connector	2
2	ST Boots	2
3	MTJR Connector	1
4	MTJR Boot	1
5	Identification Label	1
6	1.6mm Duplex Cable	1
7	Black Tape	1

## **Optical Performance** (IEC 61300-3-4): **Multimode** (@ 1300nm) MTRJ: Max. IL - 0.50dB Typical: 0.30dB ST : Max. IL - 0.30dB Typical: 0.20dB **Singlemode:** (@1310nm and/or 1550nm) MTRJ: Max. IL - 0.50dB Typical: 0.30dB Return Loss: >40dB ST : Max. IL - 0.30dB Typical: 0.20dB Return Loss: >50dB

- RoHS compliant
- Coiling Diameter of the Patchcord shall be greater than 200mm.

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.