

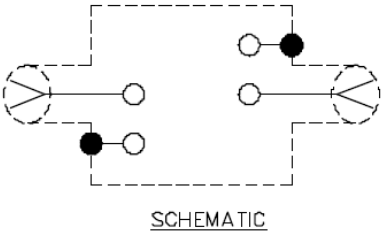




Datasheet

BNC plg-skt inline box 57.15X28.7X22.35mm

RS Stock number [196-3356](#)

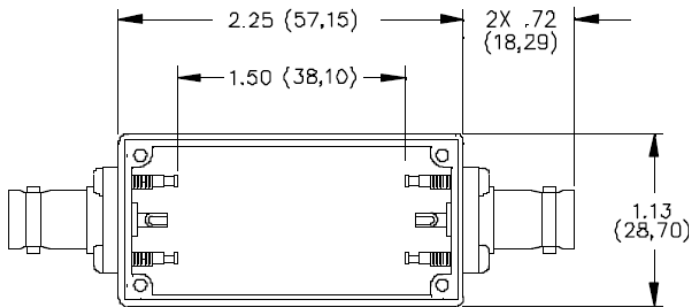

Specifications

- Connector: BNC Receptacle
- Body: Tarnish Resistant Plating, Centre Contact: Male - Gold Plated Brass, Female - Gold Plated Beryllium Copper
- Solder Turret Terminal Screws: Steel, 4 ea. #4-40
- Shielded Housing: Die cast aluminium alloy A380 or A384
- Finish: Blue paint per Federal Standard 595 #25109 over Phosphoric Etch
- Cover: .040 Thick aluminium #1100-H14
- Finish: Clear Anodized
- Screws: Steel 4 ea. #2-32 x 1/4" Pan Head, self-tapping.
- Operating Voltage: Inner conductor/shield: 335 VRMS Max.
- Operating Temperature: -55°C to +150°C
- Nominal Impedance: 50 Ohms