

DATA SHEET

RS ESSENTIALS SPEAKER

RS Stock Code: 7243100

Specifications

Rated impedance	8±20%Ω
Rated power	0.08W
Maximum power	0.15W
Resonant frequency	1500±20%Hz
Frequency range	F 700-4,000Hz
Sound output level at 0.1W/0.1m	73±3dB
Operating temperature	-20~+85°C
Storage temperature	-30~+90°C
Weight	5g±0.5g


Features

- ROHS compliant
- Housing material: Noryl
- Cone material: Mylar
- PCB mountable
- Wave solderable

All data at 25°C unless otherwise specified

Applications

- Computer and peripherals
- Telecommunication units

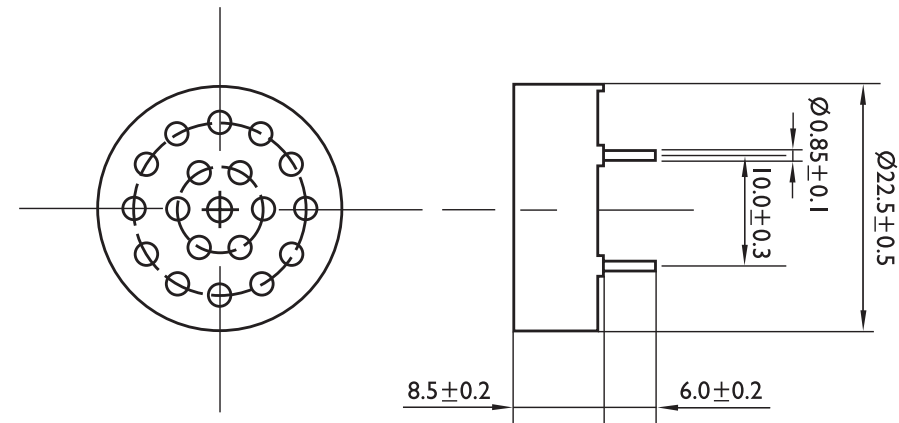

Dimensions Unit: mm Tolerance: ±0.3mm

7243100 SPEAKER - Frequency Curve

SPEAKERS

0.1W 0.5m 0.89V

