
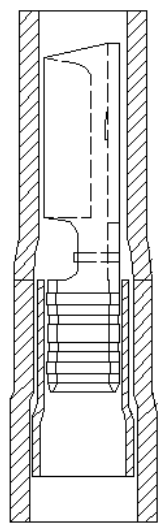
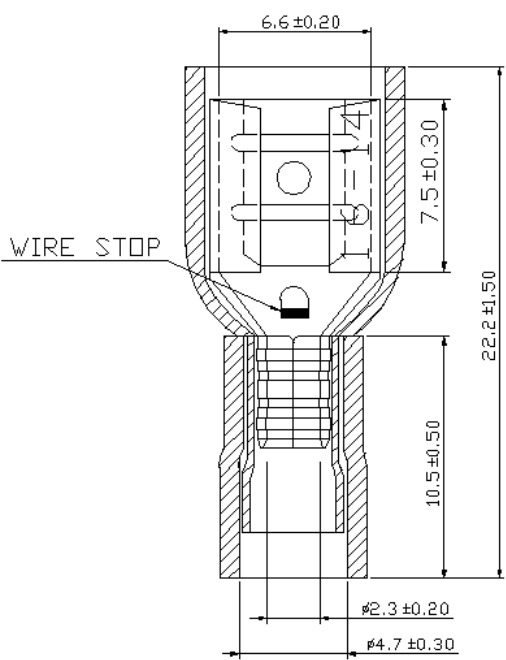


A B C D E F G H

REV	DESCRIPTION	DATE
-----	-------------	------



NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14	
AMP.	10	15	
2. MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
3. INSULATION MATERIAL : VINYL
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : BRASS
6. WIRE RANGE : 16-14 A.W.G.(1.5-2.5mm²)
7. TERMINALS SURFACE TREATMENT : TIN PLATED
8. DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
9. THICKNESS : 0.4 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	" > ° ±
30 > 75 mm ± 0.50	" > ° ±



NAME	VINYL-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS				UNIT	mm	
PART NO.	FDFD2-250@	MATERIAL	-----	APPROVE	张馨尹		
NUMBER	KA-94342-C	SCALE	SHEET	PAGE	CHECKED	林峰	
DATE	2006/03/27	3/1	1-0	20F2	DRAWN	张馨尹	

A B C D E F G H