


- Customization
- 01 series
- 03S series
- 05S series**
- 07S series
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series

# 05S 80-350

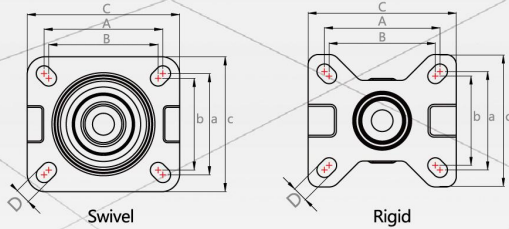

**PU**

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

**Wheel:** Thermoplastic polyurethane (PU).  
**Wheel surface hardness:** 98-100° Shore A.  
**Wheel core structure:** polypropylene (PP).  
**Bearing:** SUPO customization ball bearing with dust cover.

\* Remark: Please refer to the standard of Zhongshan caster industry association.

For more information please refer to page298.

Swivel Top Plate	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PU)	C05S-01-75-222	75(3")	38	<b>133</b>	112	75	108		(C)101x82	(A)80x60 (B)73x53	(D)11
		C05S-01D-75-222										
		C05S-04-75-222										
		C05S-01-100-222	100(4")		<b>170</b>	137	88	114				
		C05S-01D-100-222										
		C05S-04-100-222										
		C05S-01-125-222	125(5")		<b>205</b>	164	106	127				
		C05S-01D-125-222										
		C05S-04-125-222										
		C05S-01-150-222	150(6")		<b>235</b>	191	118	130				
		C05S-01D-150-222										
		C05S-04-150-222										
									(C)113x100	(A)88x75 (B)81x68		
									(C)113x101			
										(C)113x100		

## Others (MOQ)



Side lock brake(metal)	Swivel(Hollow Rivet)	Swivel(Hollow Rivet) with Total lock brake(Plastic)	Swivel(Hollow Rivet) with side lock brake(Metal)
C05S-01C-75-222	C05S-03-75-222	C05S-03D-75-222	C05S-03C-75-222
C05S-01C-100-222	C05S-03-100-222	C05S-03D-100-222	C05S-03C-100-222
C05S-01C-125-222	C05S-03-125-222	C05S-03D-125-222	C05S-03C-125-222
C05S-01C-150-222	C05S-03-150-222	C05S-03D-150-222	C05S-03C-150-222