
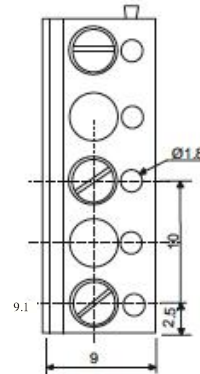



# Datasheet

## 10mm Pitch Standard Profile Terminal Block

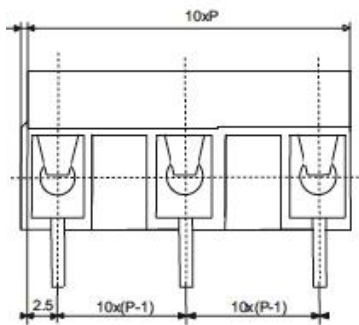

TYPE NO.	POLES	LENGTH
8970777	2	15mm
8970770	3	25mm
8970774	4	35mm
8970783	5	45mm
8970786	6	55mm
8970780	7	65mm
8970799	8	75mm
8970792	9	85mm
8970796	10	95mm
8970806	11	105mm
8970809	12	115mm

- 2-12 pole interlocking
- Moulded in black  
UL94-V0 PA66
- Wire protector terminals
- 0.13-1.3mm<sup>2</sup> (14-22 AWG)
- Guided pin alignment

### SPECIFICATION

Rating	16A 250V
Insulation resistance	5000MΩ/1000V
Withstand Voltage	AC1500V/1min
Contact Resistance	20mΩ
Working Temperature	-33°C to +120°C
Mouldings	UL94-V0 flame retardant PA66
Wire Protector	Stainless steel
Screw/Torque	M3 Steel, Nickel Plated 0.4Nm
Recommended PCB hole size	Ø1.1mm