


# NSYPLM75G

Wall mounted polyester enclosure, Thalassa  
PLM, plain door, 747x536x300mm, IP66, IK10,  
RAL 7035

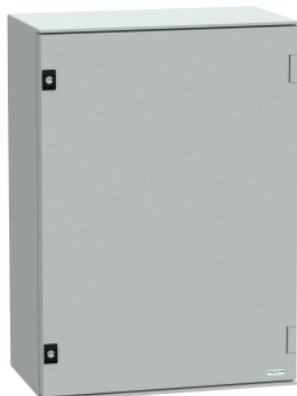

## Main

|                    |                            |
|--------------------|----------------------------|
| Range              | Thalassa                   |
| Product name       | Thalassa PLM               |
| Device short name  | PLM                        |
| Enclosure type     | Multi-purpose              |
| Category           | Compact enclosure          |
| Nominal height     | 747 mm                     |
| Nominal width      | 536 mm                     |
| Nominal depth      | 300 mm                     |
| Enclosure mounting | Wall mounted               |
| Device composition | 1 body<br>1 door<br>2 lock |
| Door type          | Plain                      |
| Lock type          | 3 mm double-bar lock       |

## Complementary

|                             |   |
|-----------------------------|---|
| Number of locks             | 2   |
| Mounting plate description  | Without mounting plate  |
| Accessibility for operation | Front   |
| Removable parts             | Door by hinges  |
| Material                    | Polyester reinforced with fibreglass                          |
| Colour                      | Grey (RAL 7035)   |
| Standards                   | IEC 62208<br>NEMA classification 13<br>NEMA classification 4X |
| Product certifications      | UL  |
| Electrical insulation class | Class II  |

## Environment

|                                       |                                |
|---------------------------------------|--------------------------------|
| IP degree of protection               | IP66 conforming to IEC 60529   |
| IK degree of protection               | IK10 conforming to IEC 62262   |
| Fire resistance                       | 960 °C conforming to IEC 62208 |
| Ambient air temperature for operation | -40...80 °C                    |

## Packing Units

|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 32.5 cm   |
| Package 1 Width              | 55.5 cm   |
| Package 1 Length             | 80.5 cm   |
| Package 1 Weight             | 14.781 kg |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| REACH free of SVHC         | Yes  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a> |
| Mercury free               | Yes  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| RoHS exemption information | <a href="#">Yes</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |