
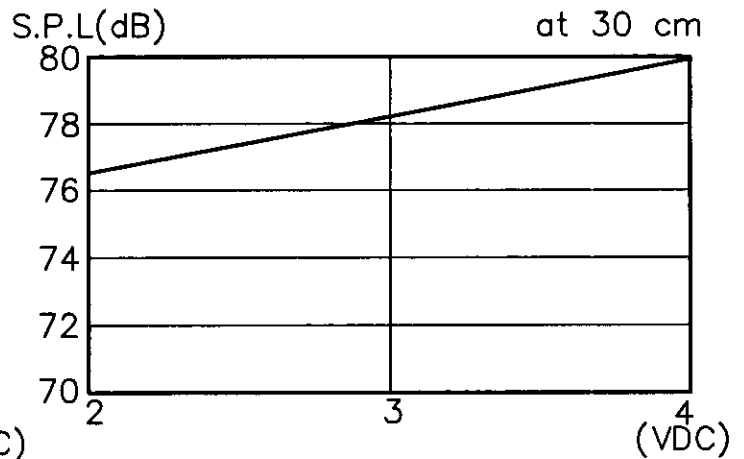


Tolerance: ±0.5mm

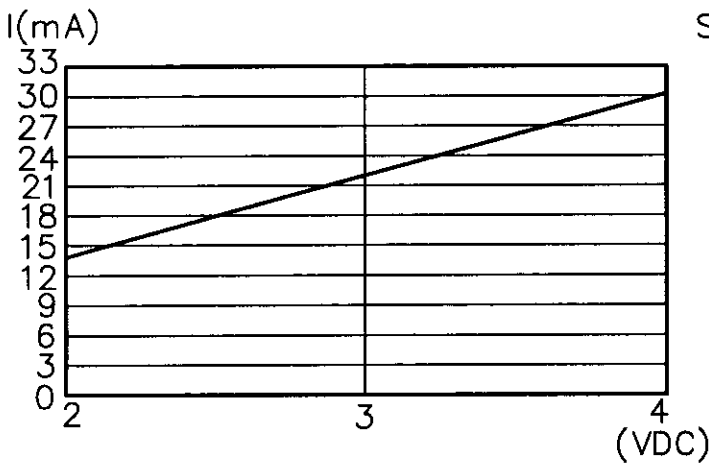

Operating Voltage (VDC)	2~4
Current Consumption at 3VDC (mA, maximum)	50
Sound Pressure Level at 30cm/3VDC (dB, minimum)	75
Tone	Continuous
Operating Temperature (°C)	-20~+60
Storage Temperature (°C)	-30~+70
Weight (Gram)	9.7

Environmental Protection Regulation

KS-Q-R-054 (RoHS)



**KINGSTATE**  
**ELECTRONICS**

<http://www.kingstate.com.tw>

<b>TITLE</b> ELECTRONIC SOLID STATE AUDIO INDICATOR		
<b>APPROVALS</b>	<b>DATE</b>	<b>PART NO.</b>
DRAWING Tracy	032906'	KSG3603
CHECKED <i>willie</i>	040706'	<b>DRAWN NO.</b> POD-2548
APPROVED <i>Peddy</i>	060706'	
⊕ ⊖ 三角法	<b>SCALE</b> 1:1	<b>MATERIAL</b>
Unit: mm	<b>SHEET</b> 1 OF 1	ABS

KS-E-R-026-1.2