


NO	DESCRIPTION	DATE
⚠	Ø19.0 → Ø20.0 JIS-H3270 → JIS-C5441	03.19.12'
⚠	DEL PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	05.22.15'

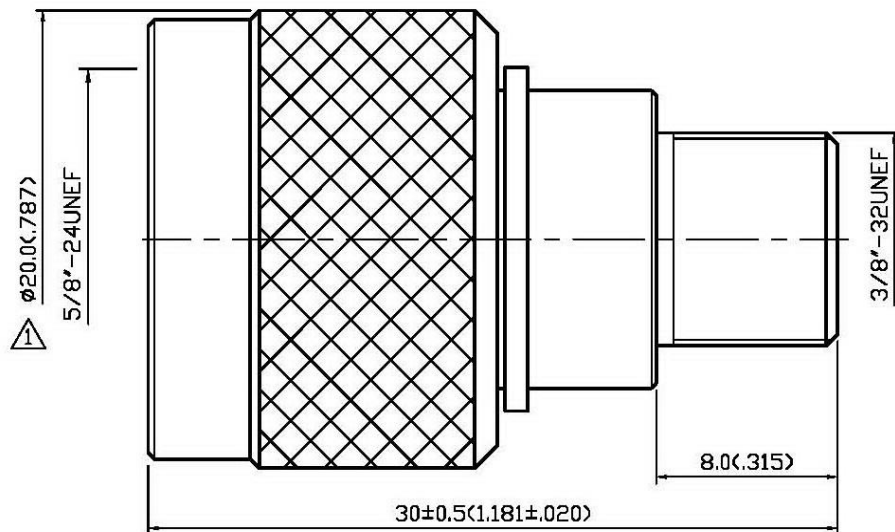

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚠

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604  
PHOSPHOR BRONZE PER JIS-C5441 ⚠

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

### 5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -40° C TO +60° C

9	BODY	BRASS	1	NICKEL 100µ" MIN.
8	SPRING	PHOSPHOR BRONZE	1	GOLD
7	INSULATION	P.P	1	NONE
6	C WASHER	BRASS	1	NICKEL
5	INSULATION	POM	1	NONE
4	O-RING	SILICONE	1	RED
3	CENTER CONTACT	BRASS	1	GOLD
2	SHELL	BRASS	1	NICKEL 100µ" MIN.
1	CHASSIS	BRASS	1	NICKEL 100µ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_



DESCRIPTION		STRAIGHT N PLUG-F JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	64-03	PP/D.G.N	日期	DATE	版次	REV.
	<i>Kristina</i>								
檢圖	CHECK	.XX ±0.1	單位	mm(in)	DWG.NO.	64-0004			
	<i>Arc</i>						SCALE		
認定	APPROVAL	.XXX ±0.05	比例	4:1					
	<i>Jenny</i>	ANGLE ±5°							