



# Datasheet

## 5mm Pitch 45° Rising Clamp Terminal

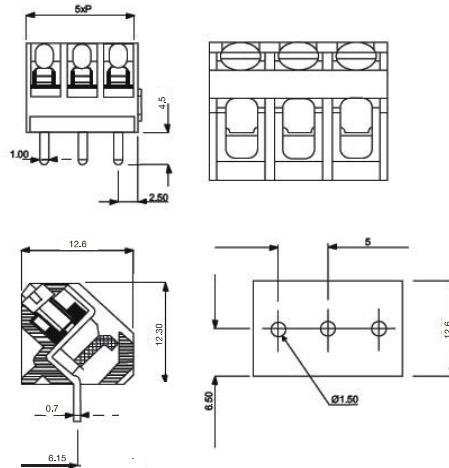

TYPE NO.	POLES	LENGTH
8970884	2	10mm
8970887	3	15mm
8970881	4	20mm
8970890	5	25mm
8970893	6	30mm
8970897	7	35mm
8970907	8	40mm
8970900	9	45mm
8970904	10	50mm
8970913	11	55mm
8970916	12	60mm

- 2-12 pole interlocking
- Moulded in black  
UL94-V0 Flame retardant PA66
- Professional rising clamp terminal
- 0.2-3.3mm<sup>2</sup> (24-12 AWG)
-  approved

### SPECIFICATION

Rating	15A 300V
Insulation resistance	5000MΩ/1000V
Withstand Voltage	AC2000V/1min
Contact Resistance	20mΩ
Working Temperature	-33°C to +120°C
Mouldings	UL94-V0 flame retardant PA66
Screw/Torque	M2.5 Steel, Nickel Plated 0.4Nm
Recommended PCB hole size	Ø1.2mm-1.4mm