Brushless DC Fan - Vapo Bearing 24V DC, 80mm x 80mm x 15mm





RoHS Compliant

Specification

Mechanical Characteristic

| Motor Design | 2 phases, 4-poles Brushless DC motor | | |
|------------------------|--|--|--|
| Bearing System | Vapo bearing system | | |
| Materials of Frame | Thermoplastic PBT of UL 94V-0 | | |
| Materials of Fan Blade | Thermoplastic PBT of UL 94V-0 | | |
| Direction of Rotation | Counter-Clockwise Viewed From Front of Fan Blade | | |
| Mounting Holes | Diameter 4.3 mm in 8 Holes | | |
| Weight | 68g | | |

Electric Characteristic

| Rated Voltage | 24V DC | |
|-----------------------------|-----------------------------|--|
| Rated Current | 65 mA / Max. 75 mA | |
| Rated Power Consumption | 1.56 Watts / Max. 1.8 Watts | |
| Operating Voltage Range | 8V DC to 27.6V DC | |
| Starting Voltage | 8V DC (25°C Power on/off) | |
| Operating Temperature Range | -10°C to + 70°C | |
| Storage Temperature Range | -40°C To + 70°C | |

Performance Characteristic

| Rated Speed | 2700 RPM ± 10% at Rated Voltage | | |
|---------------------------------------|---|--|--|
| Air Flow | 33.6 CFM | | |
| Static Pressure | 0.11 Inch-H ₂ O | | |
| Acoustic Noise | 32 dB(A) | | |
| Insulation Class | UL Class A | | |
| Insulation Resistance Plastic Housing | 10MΩ At 500V DC Between Internal Stator and Lead Wire (+) | | |
| Dielectric Strength | Applied AC 500V For one Minute or AC 600V for 2 Seconds Between Housing and Lead Wire (+) | | |
| Life Expectancy | 60,000 Hours at 40°C, 65% humidity, 90% CL. | | |
| Protection | Automatic Restart Note: In a situation where the fan is locked by an external force while the electricity is on, an increase in coil temperature will be prevented by temporarily turning off the electrical power to the motor. The fan will automatically restart when the locked rotor condition is released. | | |
| | Polarity Protection | | |

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro




Brushless DC Fan - Vapo Bearing 24V DC, 80mm x 80mm x 15mm



Safety

| SAFETY | UL | CUR | TUV | CE |
|--------|--------|--------|-----|----|
| NO. | E77551 | E77551 | ✓ | ✓ |


Performance Curves

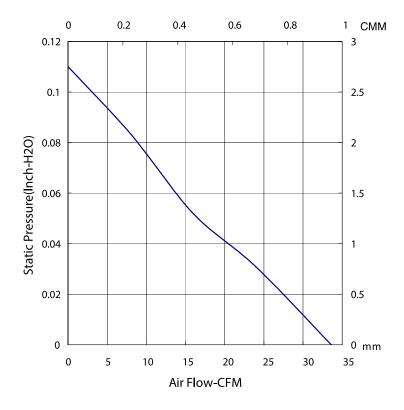

Brushless DC Fan - Vapo Bearing 24V DC, 80mm x 80mm x 15mm



Dimensions

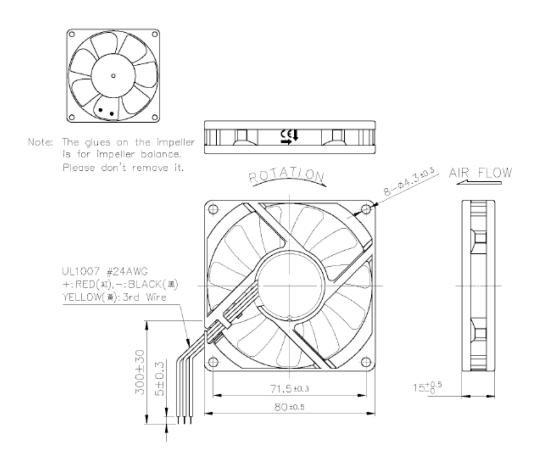

Dimensions : Millimetres

Part Number Table

| Description | Part Number |
|--|-------------|
| Brushless DC Fan, Vapo Bearing, 24V DC, 80mm × 80mm × 15mm, 3 Wire Leads | MP006484 |

Important Notice: This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro Farnell.com/multicomp-pro Element14.com/multicomp-pro

