

## Datasheet

### SPDT Rocker Switch, (On)-Off-(On)


RS Stock number 734-6883



#### Specifications:

MECHANICAL LIFE:	30,000 make-and-break cycles.
CONTACT RESISTANCE:	20m $\Omega$ max. initial @ 2-4VDC 100mA for both silver and gold plated contacts.
INSULATION RESISTANCE:	1,000 M $\Omega$ min.
DIELECTRIC STRENGTH:	1,000Vrms min. @sea level.
OPERATING TEMPERATURE:	-30°C to 85°C.
CASE & BUSHING :	Glass filled nylon 6/6, flame retardant, heat stabilized (UL94V-0).
ACTUATOR:	Nylon, black std. internal O-ring seal standard with all actuators.
SWITCH SUPPORT:	Brass or steel, tin plated.
TERMINAL/CONTACT:	Silver or gold plated copper alloy.

Dimensions – mm

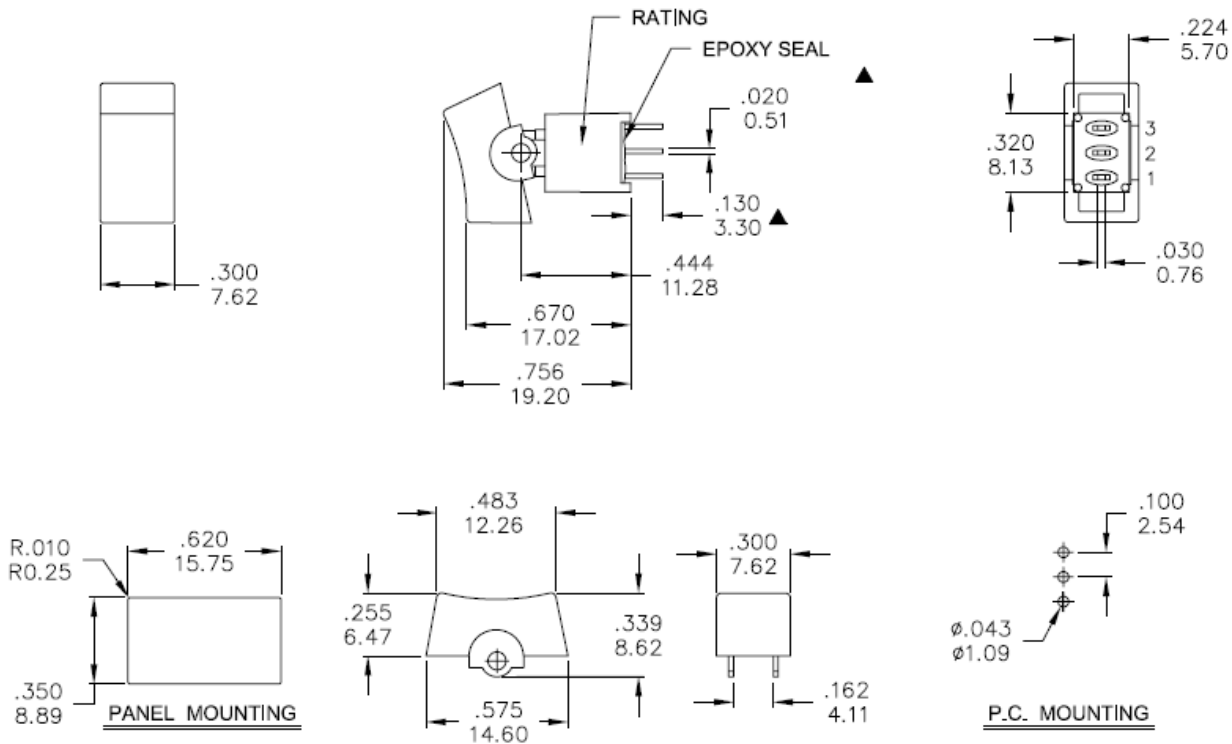

Model No.	POS.1	POS.2	POS.3
4AS4	MOM	OFF	MOM
Term. Comm.	2-3	OPEN	2-1
SCHEMATIC			

SWITCH FUNCTION