




ENGLISH

Datasheet

Fibre Glass + SSOB Thermocouple Cable 4 Core 7/0.2 Type K

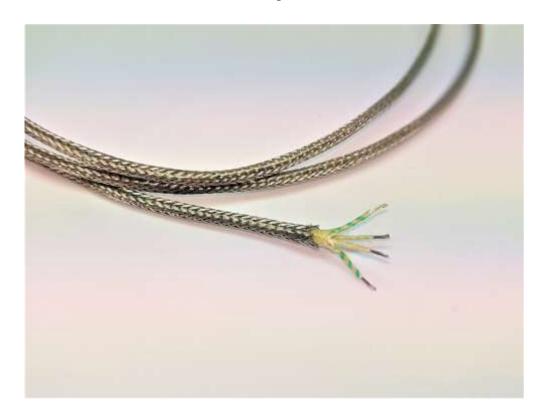

Glassfibre insulated flat pair construction, conductors laid flat, Glassfibre insulated with Glassfibre jacket, silicone varnished throughout + stainless steel overbraid for added protection and mechanical strength. Good temperature resistance but not suitable where fluids are present.

•	Insulation	Glassfibre insulated	extension cable with	າ stainless steel	loverbraiding
•	IIISUIduoii	Giassiibi e ilisulateu	extension cable with	i staiilless steel	i overbraiu

Number of Cores
Number of Strands
Conductor Size (mm)
0.2

• Max. Temperature +350°C (short periods up to 400°C)

Min. Temperature -60°C

Туре	Length	Cores	Description	Allied Code	RS Order Number
K	10m	4	7/0.2mm		2154930
K	25m	4	7/0.2mm		185-3009
K	50m	4	7/0.2mm		2154931
K	100m	4	7/0.2mm		2154932