

Datasheet

RS PRO UL 1061 Red, 0.75 mm² Hook Up Wire, 100m

Stock No: 2075293



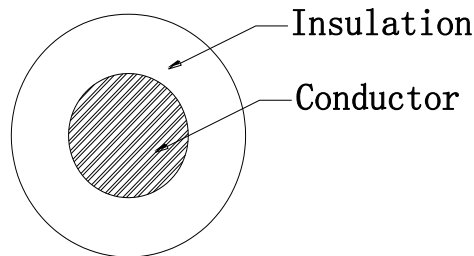
Technical Specifications:



| | |
|---------------------------------|---------------|
| Conductor | Tinned Copper |
| Cores Number | 1C |
| Size(AWG) | 18AWG |
| Construction(± 0.008 mm) | 7/0.40 |
| Stranded Dia.(mm) | 1.22 |
| Insulation Material | SR-PVC |
| Insulation Color | Red (RAL3018) |
| Ave Thickness(mm) | 0.25 |
| Min Thickness(mm) | 0.20 |
| Insulation Dia.(± 0.10 mm) | 1.73 |

Features & Benefits:

- **Rated temperature: 80 °C**
- **Conductor resistance(20°C Ω/km): 21.16Max.**
- **Insulation DC Resistance(20°C MΩ*Km): 200Min.**
- **Rated Voltage: 300V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 1061 18AWG
80°C 300V VW-1 C  AWM I A 80°C 300V FT1 -LF- -F-
ELETECK

Applications: It is designed for general applications, for internal appliance wiring