

Range datasheet


## RS Pro Cylindrical Female - Foot Anti-Vibration Mounts

### Product Details -



FEMALE - FOOT/BUMP STOP Cylindrical mounts, a simple and cost effective mount. For use in compression and shear. A very large range of available size

### Line Drawing -

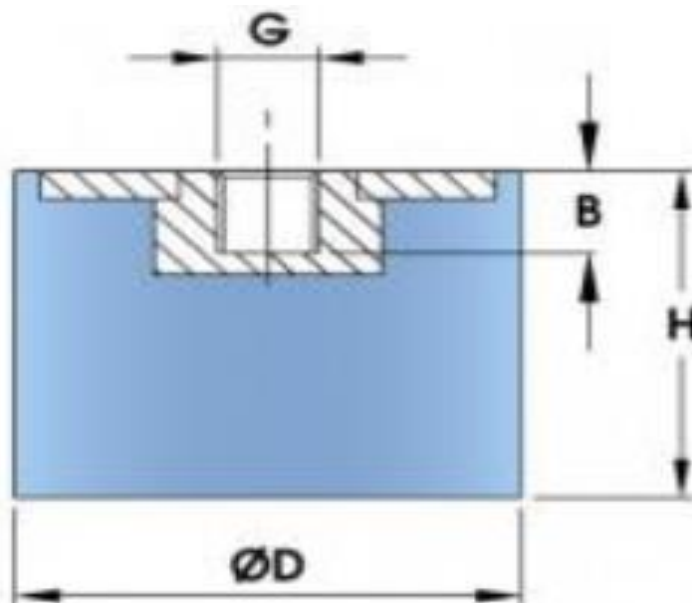



## Range Table:

RS Stock number	Description	D	H	G x L/B	45 Shore Hardness (Max KG)	60 Shore Hardness (Max KG)
					Load	Load 2
1265945	Stud Mount Cyl. Foot Mount (F) 15x15mm M4 60 ShA	15	15	M4	6	13.3
1265946	Stud Mount Cyl. Foot Mount (F) 16x10mm M4 45 ShA	16	10	M4	9	15
1265947	Stud Mount Cyl. Foot Mount (F) 20x15mm M6 60 ShA	20	15	M6	10	21
1265948	Stud Mount Cyl. Foot Mount (F) 20x17mm M5 60 ShA	20	17	M5	11.8	24.6
1263932	Cyl. Foot Mount (F) 20x20mm M6 45 ShA Silicone (VMQ) Red Oxide Stainless Steel (304 grade)	20	20	M6	11	23.5
1265949	Stud Mount Cyl. Foot Mount (F) 20x25mm M6 60 ShA	20	25	M6	10.5	22.7
1265950	Stud Mount Cyl. Foot Mount (F) 20x30mm M6 60 ShA	20	30	M6	10.2	22.3
1265951	Stud Mount Cyl. Foot Mount (F) 25x15mm M8 50 ShA	25	15	M8	21.5	43.2
1265952	Stud Mount Cyl. Foot Mount (F) 25x22mm M8 60 ShA	25	22	M8	17.8	37.4
1265953	Stud Mount Cyl. Foot Mount (F) 30x20mm M8 50 ShA	30	20	M8	29.5	60
1265954	Stud Mount Cyl. Foot Mount (F) 30x22mm M8 45 ShA	30	22	M8	27	57
1265955	Stud Mount Cyl. Foot Mount (F) 30x40mm M6 45 ShA	30	40	M6	23.3	50.8
1265956	Stud Mount Cyl. Foot Mount (F) 40x15mm M6 55 ShA	40	15	M6	71	130
1263933	Cyl. Foot Mount (F) 40x20mm M8 55 ShA Stainless Steel (304 grade)	40	20	M8	63.2	122.6
1263934	Cyl. Foot Mount (F) 40x25mm M10 55 ShA Stainless Steel (316 grade)	40	25	M10	54	112
1265968	Stud Mount Cyl. Foot Mount (F) 40x35mm M8 50 ShA	40	35	M8	46	97.8
1265969	Stud Mount Cyl. Foot Mount (F) 50x15mm M10 60 ShA	50	15	M10	63	159.8
1266369	Stud Mount Cyl. Foot Mount (F) 50x35mm M10 60 ShA	50	35	M10	77.4	159.8
1263547	Anti-Vibration Rubber (F) 75x55mm M12 55 ShA	75	55	M12	168.9	351.7