

Datasheet

SPDT PCB Mount Non-Latching Relay, 16 A, 12V dc

RS Stock number [800-4448](#)

Dimensions: mm


File No.:E134517

File No.:116934




Outline Dimensions

3.5mm Pinning (HF115F/ □□□ -□□ -□ -□□)

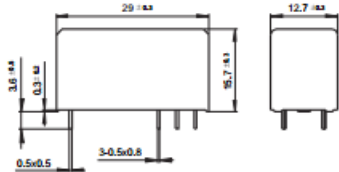


5mm Pinning (HF115F/ □□□ -□□ -□ -2/3/4 -□□)




Wiring Diagram (Bottom view)


3.5/5mm Pinning, 1 Pole, 12A, HF115F/ □□□ -1□ -□ -1/2-□□




5mm Pinning, 1 Pole, 16A, HF115F/ □□□ -1□ -□ -3-□□



5mm Pinning, 2 Pole, 8A, HF115F/ □□□ -2□ -□ -4-□□




PCB Layout (Bottom view)

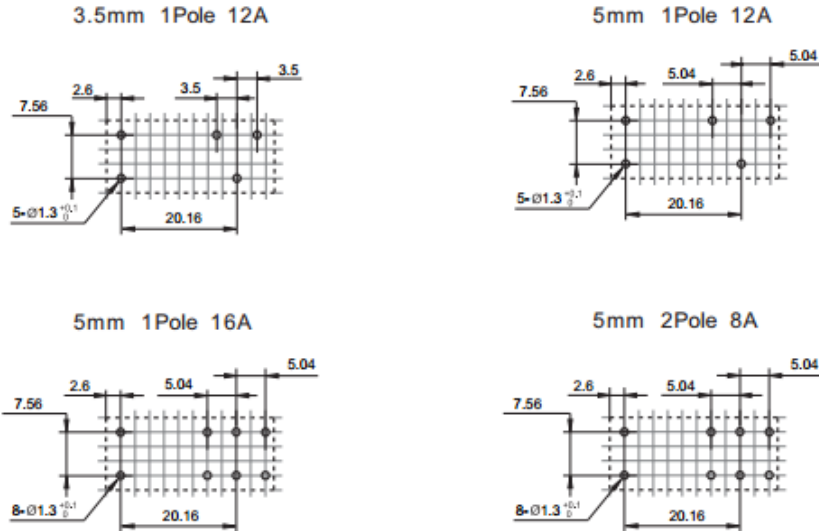

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension $\leq 1\text{mm}$, tolerance should be $\pm 0.2\text{mm}$; outline dimension $> 1\text{mm}$ and $\leq 5\text{mm}$, tolerance should be $\pm 0.3\text{mm}$; outline dimension $> 5\text{mm}$, tolerance should be $\pm 0.4\text{mm}$.
 2) The tolerance without indicating for PCB layout is always $\pm 0.1\text{mm}$.
 3) The width of the gridding is 2.52mm.

Characteristic Curves

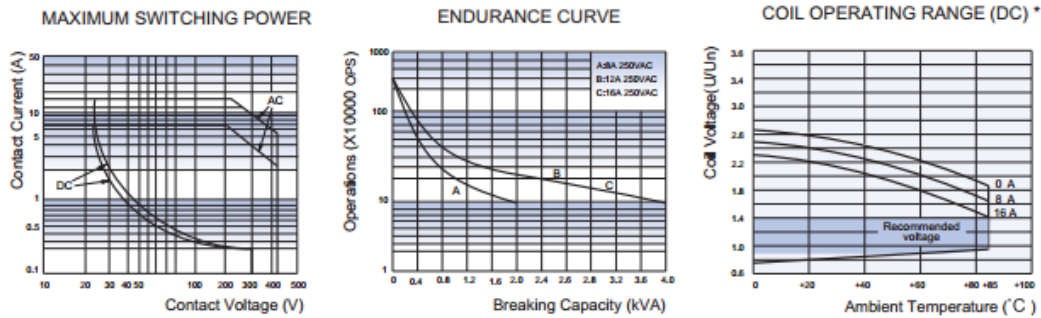

Notes: * The use of a relay with an energising voltage other than the rated coil voltage may lead to reduced electrical life. An energising voltage over the above range may damage the insulation of relay coil.

Features

- Low height- 15.7mm
- 16A switching capability
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- Meeting VDE 0700,0631 reinforce insulation
- Product in accordance to IEC 60335-1 available
- Sockets available
- Plastic sealed and flux proofed types available
- UL insulation system: Class F available
- Environmental friendly product RoHS compliant



Contact Data

Contact arrangement: 1A, 1B, 1C / 2A, 2B, 2C
Contact resistance: 100m Ω max. (at 1A 6VDC)
Contact rating (Res.load) 12A/16A 250VAC / 8A 250VAC
Max. switching voltage: 440VAC / 300VDC
Max. switching current: 12A/ 16A / 8A
Max. switching power: 3000VA ,4000VA / 2000VA
Mechanical endurance: 1x10⁽⁷⁾ OPS
Electrical endurance: 1x10⁽⁵⁾ OPS

Characteristics

Insulation resistance: 1000M Ω (at 500VDC)
Dielectric Strength: Between coil & contacts 5000VAC 1min
Between open contacts 1000VAC 1min
Between contact sets 2500VAC 1min
Surge voltage(between coil & contacts) 10kV (1.2/ 50us)
Operate time (at nomi. Volt.): 15ms max
Release time (at nomi. Volt.): 8ms max
Temperature rise (at nomi. Volt.): 55K max
Shock resistance: Functional 98m/s
Destructive 980m/s
Vibration resistance: 10Hz to 150Hz 10g/5g
Humidity: 5% to 85% RH
Ambient temperature: -40degC to 85deg
Termination: PBC
Unit weight: Approx. 13.5g
Construction: Plastic sealed
Flux Proof

Coil

Coil power: Approx. 400mW



Nominal Voltage VDC	Pick-Up voltage VDC max.	Drop- out voltage VDC min.	Max allowable voltage VDC.	Coil Resistance
5	3.50	0.5	7.5	62 x (1±10%)
6	4.20	0.6	9.0	90 x (1±10%)
9	6.30	0.9	13.5	202 x (1±10%)
12	8.40	1.2	18	360 x (1±10%)
18	12.60	1.8	27	810 x (1±10%)
24	16.80	2.4	36	1440 x (1±10%)
48	33.60	4.8	72	5760 x (1±15%)
60	42.00	6.0	90	7500 x (1±15%)
110	77.00	11.0	165	25200 x (1±15%)

Notes

The max allowable voltage in the coil data is coil overdrive voltage, it is the instantaneous max voltage which the relay coil could endure in a very short time.