

Datasheet

Stock No: 179-2923, 179-2925, 179-2926

Analogue Dial On Delay Timer with Instantaneous contact



Specifications:


- 8 pin plug-in
- Analogue Dial Display
- On-Delay with Instantaneous contact.



ENGLISH

RS Stock No	179-2923	179-2925	179-2926
Specification			
Supply Voltage	220Vac	110Vac	24Vdc
Operating Voltage Range	85~110% rated supply voltage		
Display type	Analogue Dial Display		
Timing Function	On-Delay with Instantaneous contact.		
Timing Range	0.1s – 300h		
Contact	Configuration	A: 2SPDT (2C) H: Signal ON/OFF delay	
	Rated Current AC-1	5A @ 250VAC (p.f. =1)	
Repetitive Error	$\pm 0.3\%$ (FS max.), ($\pm 0.3\%$ 10ms max. in range of 1.2s)		
Setting Error	$\pm 5\%$ (FS max.) $\pm 5\text{ms}$		
Voltage Error	$\pm 0.5\%$ (FS max.) ($\pm 0.5\%$ $\pm 10\text{ms}$ max. in a range of 1.2s)		
Temperature Error	$\pm 2\%$ (FS max.) ($\pm 2\%$ $\pm 10\text{ms}$ max. in a range of 1.2s)		
Resetting Time	0.1sec		
Insulation resistance	100MW (DC500V)		
Vibration Resisance	Destruction	10~55Hz with 0.75mm single amplitude each in 3directions for 2 hours each	
	Malfunction	10~55Hz with 0.5mm single amplitude each in 3 directions for 10 minutes each	
Shock Resistance	Destruction	30G	
	Malfunction	10G	
Life Expectancy	Electrical Life	$> 10^7$	
	Mechanical Life	$> 10^5$ (AC 250V, 5A)	
Mounting	8 Plug-in, Panel Mount		
Unit Weight	Approx.95g		
Certification			

Mounting Dimensions (mm)

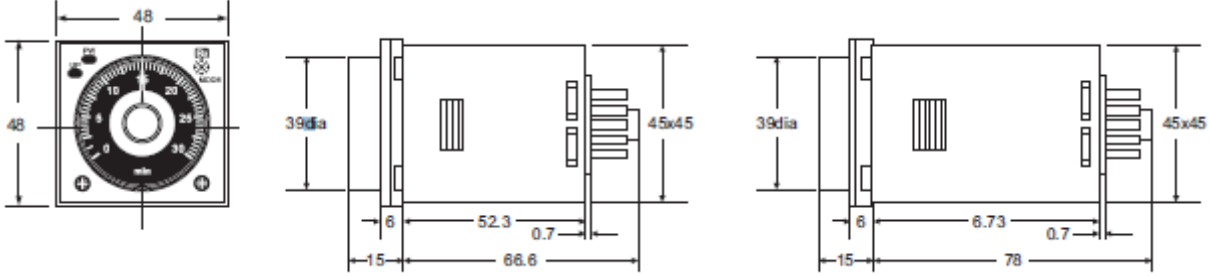

Connection Diagram

