

FEATURES

- **USB A to USB B**
- **Male-to-male connectors**
- **Three metres long**
- **USB 3.0 SuperSpeed, with a maximum transfer rate of 5 Gbps**
- **Compatible with USB 2.0**
- **Screened cable shielding to reduce electrical noise**
- **48% braid coverage lowers electromagnetic radiation while retaining flexibility**

RS PRO Male USB A to Male USB B USB Cable, USB 3.0, 3m, USB 3.0

RS Stock No.: 790-3697



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO male-to-male USB A to USB B cable will connect a device with a USB A port like a laptop or keyboard to larger USB B compatible equipment. Examples of these include printers and scanners. The USB 3.0 SuperSpeed functionality gives a transfer rate of up to 5 Gbps, making this a practical choice for speed-critical settings. The cable's handy three-metre length also lets you place peripherals where they're most convenient.

General Specifications


USB Type	USB 3.0
Connector A	Male USB A
Connector A Type	USB A
Connector A Gender	Male
Connector B	Male USB B
Connector B Type	USB B
Connector B Gender	Male
Connector Style	straight
Outer Sheath Material	PVC
Data Transfer Rate	5 Gbps
Sheath Colour	White
Applications	Laptop, Phones

Mechanical Specifications

Length	3m
---------------	----

Approvals

Standards Met	RoHS, REACH, CE
----------------------	-----------------



USB CONNECTOR TYPES



USB Plug (Male):

-  Micro B
-  Mini B
-  8 Pin Lightning
-  Type A 2.0
-  Type B 2.0
-  Type A 3.0
-  Type B 3.0
-  Type C 3.0

USB Port (Female):

-  Micro B
-  Mini B
-  8 Pin Lightning
-  Type A 2.0
-  Type B 2.0
-  Type A 3.0
-  Type B 3.0
-  Type C 3.0

Discover more at [www.rs-online.com/](https://uk.rs-online.com/)

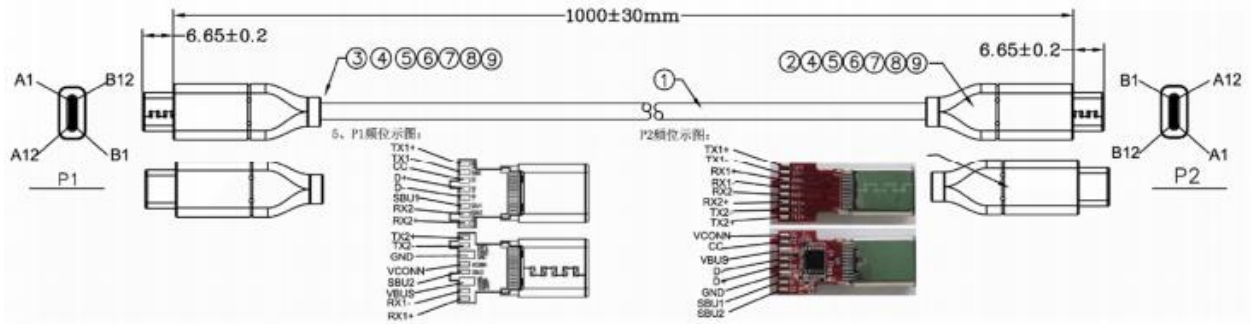

⑨	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel up ~ (No riveting claw)
⑧	USB TYPE C~SOLDER TYPE~ Tin Plating Nickel Down~ (No riveting claw)
⑦	USB TYPE-C cable Small clamp (use TYPE-C) texture: NY-66+15%GF, 24*32*34AWG
⑥	H.S.T \neq 2.0 Thin wall
⑤	TRANSPARENT PE ROHS LDPE
④	45P Black PVC ROHS
③	USB 3.1 C Type Connector With ~PCBA(NO IC) ,full PIN
②	USB 3.1 C Type Connector With ~PCBA, with IC (IC:VIA) full PIN
①	USBS: 1 st (34AWG (2/0, 06TC) +EAM)+4P+32AWG (2/0, 06TC)+1P+24AWG (2/0, 206TC)+2C+32AWG (2/0, 06TC)+4C+AB (1.6/10/0, 08 30NCT) OD:4.5MM BLACK NO MARKING