


NO	DESCRIPTION	DATE
①	DEL PROOF VOLTAGE WORKING VOLTAGE VOLTAGE RATING ø15.0 → ø14.5 MODIFICATION PART ①	02.27.14'

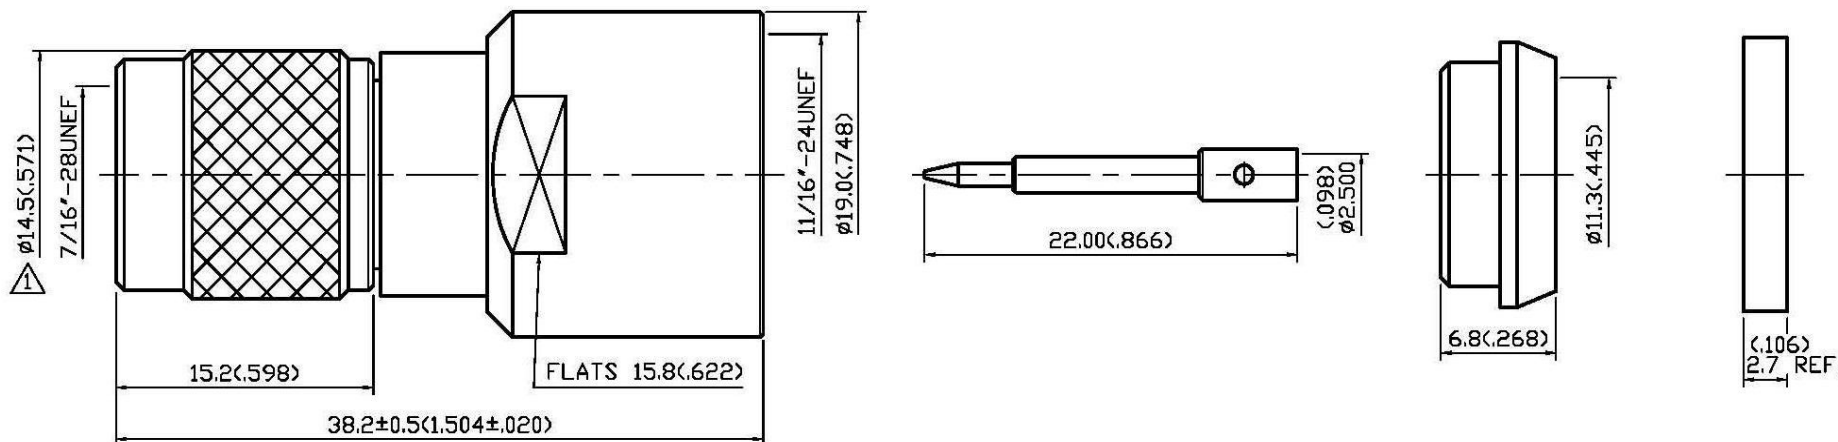

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ①

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.


4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A
- 4.2 FOR USE WITH RG213U OR SIMILAR STYLE CABLE
- 4.3 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C

03/03/2014

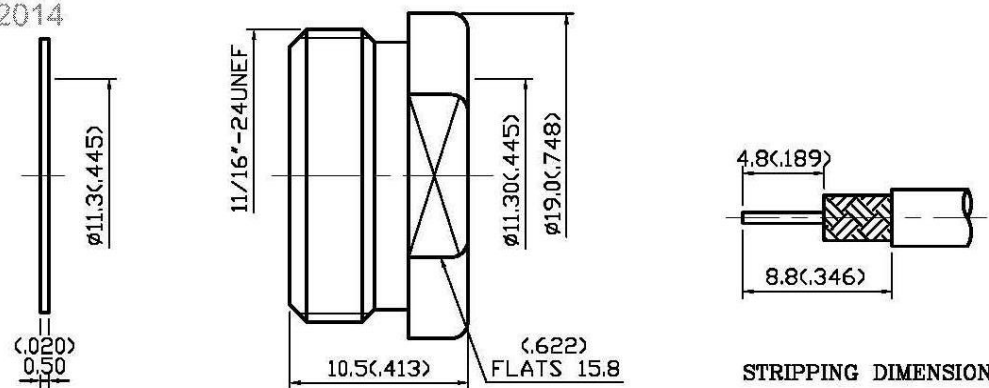

APPROVED by _____ DATE: _____

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
11	NUT	BRASS	1	NICKEL 100μ" MIN.
10	CENTER CONTACT	BRASS	1	GOLD
9	WASHER III	BRASS	1	NICKEL
8	GASKET II	SILICONE	1	RED
7	BRAID CLAMP	BRASS	1	NICKEL 100μ" MIN.
6	WASHER II	BRASS	1	NICKEL
5	BODY	BRASS	1	NICKEL 100μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	WASHER I	BRASS	1	NONE
2	GASKET I	RUBBER	1	RED
1	SHELL	BRASS	1	NICKEL 100μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



DESCRIPTION		TOLERANCE		品名		15-03-8		T.G.N		213U		DATE		REV.	
製圖	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT	日期	08.07.95'	版次	B-1						
檢圖	Arc	.XX	±0.1	單位	mm(in)	DWG.NO.	15-0171								
認定	Angela	.XXX	±0.05	比例	SCALE										
		ANGLE	±5°		3:1										