

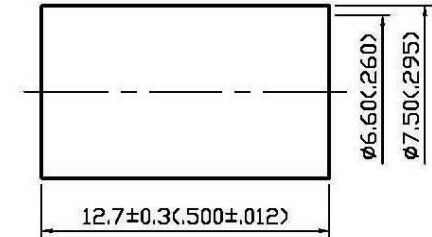



NO	DESCRIPTION	DATE
⚠	BACKGROUND FORMAT UPDATED	06.28.10'
⚡	DEL. PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	06.18.14'

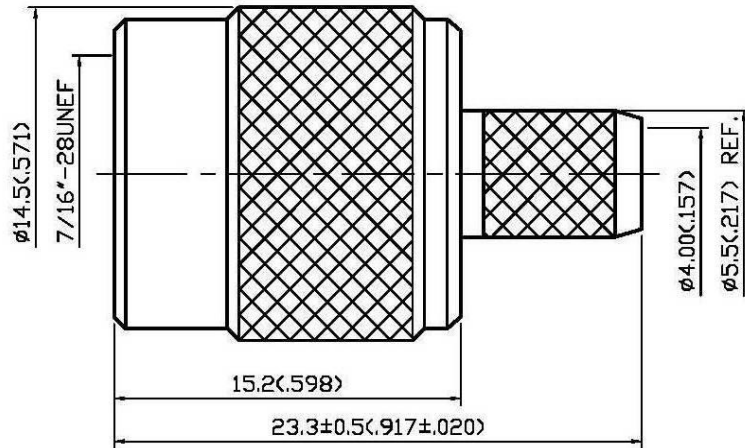

STRIPPING DIMENSION

**1.0 ELECTRICAL**

- 1.1 FREQUENCY RANGE: DC-1 GHz
- 1.2 NOMINAL IMPEDANCE: 75 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ⚡

**2.0 MATERIALS**

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 2.4 CRIMP FERRULE: BRASS PER JIS-C2700

**3.0 FINISHES AND OTHERS**

3.1 SEE BELOW TABLE FOR DETAILS.

**4.0 MECHANICAL**

- 4.1 FOR USE WITH RG59U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER/CRIMP
- 4.3 CRIMP SIZE REQUIRED: CONTACT: 1.8(071) HEX. CRIMP TOOL  
FERRULE: 8.5(256) HEX. CRIMP TOOL

**5.0 ENVIRONMENTAL**

5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C

NO	DESCRIPTION	MATERIAL	Q' TY	FINISH
7	CENTER CONTACT	BRASS	1	GOLD
6	CRIMP FERRULE	BRASS	1	NICKEL
5	SHELL	BRASS	1	NICKEL 100μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	GASKET	RUBBER	1	RED
2	BODY	BRASS	1	NICKEL 100μ" MIN.
1	WASHER	BRASS	1	NONE



APPROVED by \_\_\_\_\_ DATE: \_\_\_\_\_

DESCRIPTION		TNC STRAIGHT PLUG CRIMP									
製圖	DRAWN	TOLERANCE		品名	15-10-1	T.G.N	59U	日期	DATE	版次	REV.
	Kristina	X	±0.2	TITLE	\ROHS COMPLIANT		(75Ω)	11.14.06'		A-2	
檢圖	CHECK	XX	±0.1	單位	DWG.NO.		15-0019				
	Angela	XXX	±0.05	mm(in)							
認定	APPROVAL	XXX	±0.05	比例	SCALE						
	Angela	ANGLE	±5°	4:1							