



ENGLISH

## Datasheet


# RS PRO 4 pairs S/FTP Cat7A LSZH

Stock No: 2115756

LN-A0422AP7A-LIS-020-GY-100



Cross Section

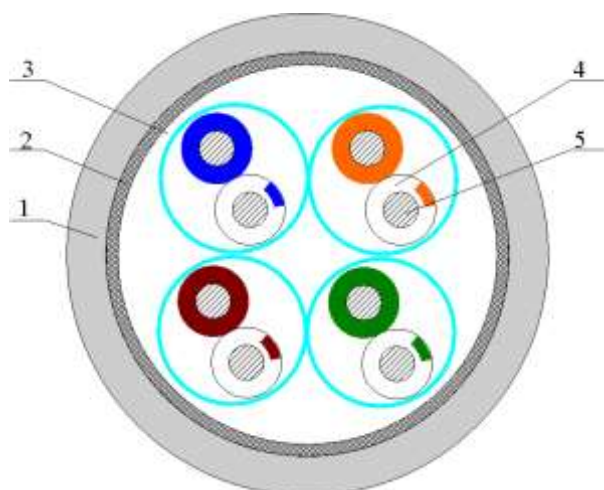

1	Outer jacket
2	Braid shield
3	AL/Polyester
4	Insulation
5	Conductor

## Physical characteristics

<b>Structure</b>	Construction	S/FTP
	Number of Pairs	4
<b>Conductor</b>	AWG	22AWG
	Conductor material	Solid bare copper
	Conductor dimension	0.63±0.02mm
<b>Insulation</b>	Insulation material	Foam PE
	Insulation dimension	1.49±0.05 mm
	Number colour	1.White/Blue(Stripe) & Blue
	(Stripe marking)	2.White/Orange(Stripe) & Orange 3.White/Green(Stripe) & Green 4.White/Brown(Stripe) & Brown
<b>Cabling</b>	Twisting lay length	≅ 30mm
	Cabling lay length	≅ 200mm
<b>Filler</b>	Filler material	N/A
<b>Shield</b>	Individual shield & material	AL/Polyester,AL-foil facing outside
	Primary overall shield braid&material	Tinned copper
	Shield coverage Nom	30%
	Drain wire	N/A
<b>Outer jacket</b>	Outer jacket material	LSZH
	Outer jacket thickness (Min.)	0.4 mm
	Overall nominal dimension	7.8±0.3mm
	Outer jacket rip cord	N/A
	Outer jacket colour	Gray (RAL7037)
<b>Mechanical characteristics</b>	Operating temperature range	-20 °C ~ +75 °C
	Max. recommended pulling tension	80N
	Min. bend radius (Install)	8 x O.D
	Outer jacket tensile strength	≅ 9 MPa
	Outer jacket elongation	≅ 100%
	Outer jacket aging condition	(100±2)°C x 168 hrs
	After aging, Tensile strength	≅ 70% of Unaging
	After aging, Elongation	≅ 50% of Unaging
Cold bend	No crack (@ -20°C x 4hrs)	
<b>Electrical characteristics</b>	Nom. mutual capacitance	≅ 5.6 nF/100m (@1kHz)
	Pair to ground capacitance unbalance	≅ 1600 pF/km
	Nominal velocity of propagation	74%
	Max. delay skew	25 ns/100m
	Max. conductor DC resistance	9.5 Ω/100m (@ 20 °C)
	Max. Conductor resistance unbalance	2% (@20 °C)
	Resistance unbalance between pairs	≤5% (@ 20 °C)
	Min. insulation resistance	5000 MΩ·m
Max. operating voltage - UL	300 V	

## Performance ( Test Length : 100m )

### Electrical characteristics:

Frequency (MHz)	Attenuation (dB/100m)	NEXT (dB Min)	PSNEXT (dB Min)	Return loss (dB Min)	ACR-F (dB Min)	PSACR-F (dB Min)	PD (ns/100m )	TCL (dB Min)
4	3.74	78.0	75.0	23.0	78.0	75.0	552.0	34.0
8	5.22	78.0	75.0	24.5	77.2	74.2	546.7	31.0
10	5.82	78.0	75.0	25.0	75.3	72.3	545.4	30.0
16	7.34	78.0	75.0	25.0	71.2	68.2	543.0	28.0
20	8.20	78.0	75.0	25.0	69.3	66.3	542.0	27.0
25	9.17	78.0	75.0	24.3	67.3	64.3	541.2	26.0
31.25	10.26	78.0	75.0	23.6	65.4	62.4	540.4	25.1
62.5	14.57	78.0	75.0	21.5	59.4	56.4	538.6	22.0
100	18.52	75.4	72.4	20.1	55.3	52.3	537.6	20.0
150	22.82	72.8	69.8	18.9	51.8	48.8	536.9	18.2
200	26.47	70.9	67.9	18.0	49.3	46.3	536.5	17.0
250	29.73	69.4	66.4	17.3	47.3	44.3	536.3	16.0
300	32.69	68.2	65.2	17.3	45.8	42.8	536.1	-
600	47.10	63.7	60.7	17.3	39.7	36.7	535.5	-
800	54.92	61.9	58.9	16.1	37.2	34.2	535.3	-
1000	61.93	60.4	57.4	15.1	35.3	32.3	535.1	-

Frequency (MHz)	Input Impedance upper limit	Input Impedance lower limit
	( $\Omega$ )	( $\Omega$ )
4	115.2	86.8
8	112.6	88.8
10	111.9	89.4
16	111.9	89.4
20	111.9	89.4
25	112.9	88.5
31.25	114.1	87.7
62.5	118.3	84.5
100	121.9	82.0
150	125.7	79.6
200	128.8	77.6
250	131.5	76.0
300	131.6	76.0
600	131.6	76.0
800	137.4	72.8
1000	142.8	70.0
	-	-
	-	-

#### Note:

\* Test ambient temp. is 20°C

\* Cable that meet the requirements of the characteristic impedance are not required to be measured for return loss, alternately cables that meet the return loss requirements are not required to be measured for characteristic impedance.

\* If FEXT loss is greater than 90 dB, EL FEXT loss may not be calculated.

\* Cable measurement precautions

Mutual capacitance, capacitance unbalance, characteristic impedance, return loss, insertion loss, SRL, NEXT loss, ACRF, TCL, and TCTL measurements and calculations shall be performed on cable samples of 100 m (328 ft) removed from the reel or packaging. The test sample shall be laid out along a non-conducting surface, loosely coiled, or supported in aerial spans, and all pairs shall be terminated according to the specific requirements of this annex. Other test configurations are acceptable if correlation to the reference method has been verified. In case of conflict, the reference method (100 m, off-reel, resistor terminated) shall be used to determine conformance to the minimum requirements of this standard.

## Description

- Rated temperature: 75°C
- Reference standard: IEC 61156-5 & ISO/IEC 11801,
- Product standard certification: CPR
- Flame test: EUROCLASS Eca
- Solid bare copper conductor
- Colour-coded PE insulation
- LSZH jacket
- Packaging: Per customer request

## Application

- 100Base-T4
- 100Base-TX
- 100VG-AnyLAN
- 1000Base-T
- 1000Base-TX
- 155Mbps ATM
- 622Mbps ATM
- 10 Gb Ethernet

## Marking

HUAXUN LAN CABLE 4PR 22AWG EUROCLASS Eca S/FTP CAT7A LSZH 75°C YYYYMMDDJNN \*\*\*\*\*M

### Note:

1. The jacket shall be used black ink jet print marking except white color on black jacket.
2. YYYYMMDDJNN-Batch number.
3. \*\*\*\*\*- sequential meter marking with 1m interval.
4. Marking height :3+/-0.3mm, width 2+/-0.3mm.