




ENGLISH

High Deflection Motor Mount

SCM mounts are ideal for applications that require high deflection under low loads while operating under low frequencies. Flexible in all directions, the SCM mount is also an ideal product for shock applications by deflecting and returning to its original shape.

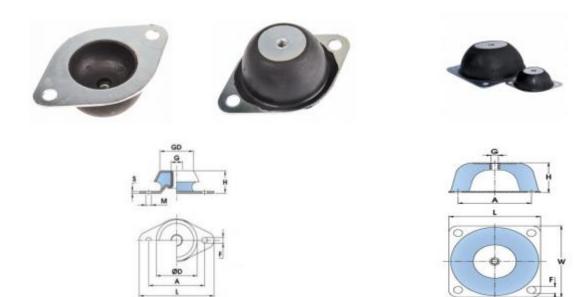

Features:

- Achieves high isolation values (both active and passive) of low frequency vibration
- Attenuates shock loads due to its deflection capacity.
- Available in mild steel metal for food & mining industry applications

Applications:

- Fans
- Pumps
- Stationary generator sets
- Vibrating screens
- Bulk bin load and discharge units
- · Computers, security cameras
- Packaging and transit case mountings





ENGLISH

| RS Part No. | Part No. | н | L | w | G | A | F | Shape | Max | Deflection |
|-------------|---------------|----|-----|-----|-----|-----|--------|-------|------|------------|
| | | | | | | | (dia.) | | Load | (mm) |
| | | | | | | | | | (kg) | |
| 1623219 | SCM6420M6-1 | 20 | 64 | 43 | М6 | 50 | 7 | Oval | 3.5 | 3 |
| 1623223 | SCM6420M6-2 | 20 | 64 | 43 | М6 | 50 | 7 | Oval | 9 | 3 |
| 1623226 | SCM8525M6-3 | 25 | 85 | 56 | М6 | 66 | 8 | Oval | 59 | 4 |
| 1623217 | SCM11435M8-2 | 35 | 114 | 76 | М8 | 92 | 10 | Oval | 80 | 6 |
| 1623249 | SCM11435M8-1 | 35 | 114 | 76 | М8 | 92 | 10 | Oval | 40 | 6 |
| 1623224 | SCM14825M10-3 | 25 | 148 | 100 | M10 | 124 | 10.2 | Oval | 200 | 3 |
| | | | | | | | | | | |