


Specifications:

Resistor Element Material	: Carbon Film
Resistance Value	: 0Ω
Finished Size	: 1.85mm × 3.58mm
Lead Wire Diameter	: 0.45 ±0.05mm
Pitch of Tape (PT)	: 52mm
Power Rating	: 125mW
Voltage Rating	: 200V
Temperature Coefficient	: ± 350ppm/°C
Resistor Terminals	: Axial Leaded
Resistor Mounting	: Through Hole
Body Diameter	: 1.85mm
Body Length	: 3.5mm
No. of Pins	: 2
Operating Temperature Range	: -55°C to +155°C
Steel Core Type	

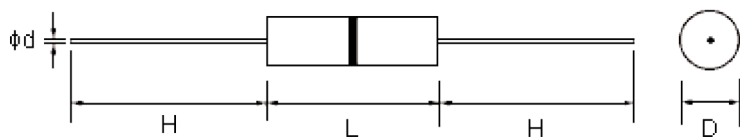

Dimensions : Millimetres

Steel Core Type

Rating Wattage (W)	Maximum D	Maximum L	H ±3	d ±0.05
1/8	1.85	3.5	28	0.45

Construction

Confirmation List of Material

Subpart Name	Material	Material Generic
Body basic	Steel core	Tin plated iron
Lead	Annealed copper wire	Tin-coated copper wire
Coating	Insulated resin (colour : beige)	Epoxy paint

Characteristics

Requirements	Characteristics
Maximum resistance	0.003Ω maximum
Lead material	Tin-plated copper
Body material (MC-type)	Electrical grade, high performance moulding compound
Insulation resistance	Dry : 10,000MΩ Wet : 100MΩ
Dielectric-withstanding voltage	Atmospheric : 500Vrms Reduced : 325Vrms
Insulation flammability	Resistor insulation is self extinguishing with 10 seconds after externally applied flame is removed
Current rating	25 amperes at 25°C derating to 0 amperes at 150°C

Part Number Table

Description	Part Number
Resistor, Carbon Film, 125mW, 0R	MCRE000000

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.