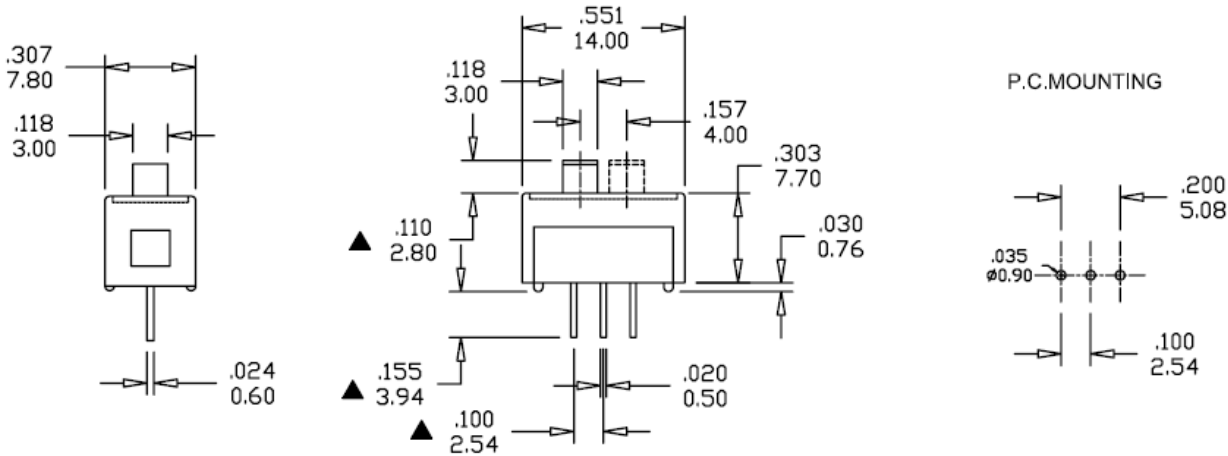




Datasheet

PCB Slide Switch SPDT On-On 3 A Top

RS Stock number [734-7343](#)

Drawing (mm):



Model No.	POS.1	POS.2	POS.3
	6MS1	ON	NONE
Term. Comm.	2-1	OPEN	2-3
SCHEMATIC			

SWITCH FUNCTION



SPECIFICATIONS

CONTACT RESISTANCE: 50m Ω max. initial .

MECHANICAL LIFE : 20,000 make-and-break cycles.

INSULATION RESISTANCE: 1,000M Ω min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -40° C to 80° C.

BREAKING CAPACITY : Silver : 1A 250VAC : Gold 100mA 30VDC :
With Resistive Load.

MINIMUM LOAD : Silver : 100mA 10VDC : Gold : 10mA 50mV.

MATERIALS

CASE - Nylon , white.

ACTUATOR - Nylon,black .

HOUSING - Nylon,black .

CONTACT - Silver or Gold plated copper alloy .

TERMINALS - Silver or Gold plated copper alloy .