

Features

- Natural rubber
- Consists of two parts, a rubber ring and a rubber bush bonded to a central metal spacer
- Dynamic vertical movement is restricted
- Excellent horizontal stability
- Dynamic efficiency in all directions
- Accommodate marginal distortion and misalignment
- Operating temperature range from -30 °C to +100 °C
- Easy to installation and low cost

RS PRO Anti-Vibration Pedestal Mount

RS Stock No.: 126-3584




RS PRO Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Anti-Vibration Pedestal Mount is designed to take vertical load applied in both shear and compression to give maximum isolation from vibrating machinery. Suitable for use in a wide variety of applications including pumps, compressors, centrifugal fans, and blowers.

General Specifications

Thread Size	M10
Diameter	32 mm
Foot Height	32 mm
Overall Height	32 mm
Static Load Capacity	113 kg (Axial) / 22 kg (Radial)
Material	Rubber
Mounting Type	Screw-in
Foot Shape	Round
Shore Hardness	60 Shore A
Metalwork	Steel
Maximum Operating Temperature	+100°C
Minimum Operating Temperature	-30°C

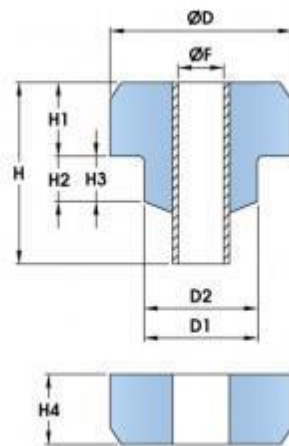

F	D	D1	D2	H1/H4	H2	H3	H
10 mm	32 mm	20 mm	19.3 mm	12 mm/7.5 mm	5 mm	10 mm	32 mm