

Thermal imager

testo 872 – Smart thermography with the highest image quality.

Infrared resolution 320 x 240 pixels
with testo SuperResolution technology 640 x 480 pixels

Thermal sensitivity (NETD) of < 0.05 °C (50 mK)

With testo Thermography App for on-site analysis
and report generation

Integration of further measurement parameters via Bluetooth

Automatic detection of hot and cold spots

testo ScaleAssist for comparable images
in building thermography, and IFOV warmer

Integrated 5 MP digital camera

Integrated laser marker – also precisely visible as a
measuring point in the thermal image



The testo 872 thermal imager stands out thanks to its resolution of 320 x 240 pixels, a very high thermal sensitivity, numerous innovative functions, smartphone connection via the testo Thermography App and the best price-performance ratio of its class.

In addition to this, it fits comfortably in the hand and convinces with intuitive operation in a modern tile look. For even more meaningful thermal images, the thermal imager testo 872 also integrates the measurement values of the clamp probe testo 770-3 as well as the thermohygrometer testo 605i via Bluetooth (both available as an option).

Ordering data

testo 872






testo 872 thermal imager with integrated testo SuperResolution technology, radio module BT/WLAN, USB cable, mains unit, lithium-ion rechargeable battery, professional software (free download), 3 x testo ϵ -markers, commissioning instructions, calibration protocol and case



Order no. 0560 8721

testo Thermography App

With the testo Thermography App, your smartphone/tablet becomes a second display, and a remote control for your thermal imager. In addition to this, you can use the App to create and send compact reports on site, and to save them online. Download for Android or iOS now free of charge.

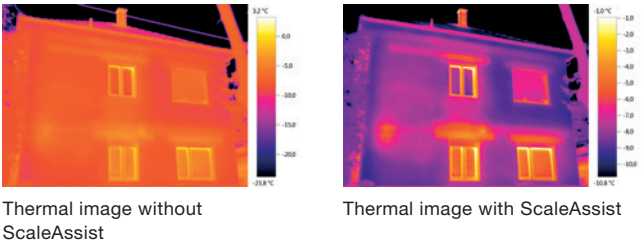






Accessories	Order no.
Spare battery, additional Li-ion rechargeable battery for extending the operating time.	0554 8721
Battery-charging station, desktop charging station for optimizing the charge time.	0554 1103
testo ϵ -marker (10 off), markers for the testo ϵ -Assist function for the automatic determination of emissivity and reflected temperature.	0554 0872
Holster case	0554 7808
PC software testo IRSoft for analysis and reporting	0501 8809
ISO calibration certificate, calibration points at 0 °C, +25 °C, +50 °C	0520 0489
ISO calibration certificate, calibration points at 0 °C, +100 °C, +200 °C	0520 0490
ISO calibration certificate, freely selectable calibration points in the range -18 to +250 °C	0520 0495

Compatible measuring instruments for more meaningful thermal images	Order no.
<p>testo 605i thermohygrometer with smartphone operation, including batteries and calibration protocol</p> <ul style="list-style-type: none"> • Measurement of air humidity and air temperature • Direct transmission of measured values to the testo 872 thermal imager via Bluetooth and detection of mould-risk areas with traffic light principle 	0560 2605 02
<p>testo 770-3 clamp meter including batteries and 1 set of measuring cables</p> <ul style="list-style-type: none"> • Easy to operate thanks to the fully retractable pincer arm • Auto AC/DC and large two-line display • Transmission of readings to the thermal imager testo 872 via Bluetooth 	0590 7703

testo ScaleAssist

Since the temperature scale and colouring of thermal images can be adapted individually, it is possible that the thermal behaviour of a building, for example, can be wrongly interpreted. The testo ScaleAssist function solves this problem by adjusting the colour distribution of the scale to the interior and exterior temperature of the measurement object and the difference between them. This ensures objectively comparable and error-free thermal images.



Technical data

Infrared image output	
Infrared resolution	320 x 240 pixels
Thermal sensitivity (NETD)	<0.05 °C (50 mK)
Field of view/min. focusing distance	42° x 30° / < 0.5 m
Geometric resolution (IFOV)	2.3 mrad
testo SuperResolution (pixels/IFOV)	640 x 480 pixels 1.3 mrad
Image refresh rate	9 Hz
Focus	Fixed focus
Spectral range	7.5 to 14 µm
Visual image output	
Image size / min. focusing distance	5 MP / min. 0.5 m
Image presentation	
Image display	8.9 cm (3.5") TFT, QVGA (320 x 240 pixels)
Digital zoom	2x, 4x
Display options	IR image / real image
Colour palettes	Iron, rainbow, rainbow HC, cold-hot, blue-red, grey, inverted grey, sepia, Testo, iron HT
Data interface	
WLAN Connectivity	Communication with the testo Thermography App
Bluetooth ¹⁾	Measurement value transfer from thermohygrometer testo 605i, clamp meter testo 770-3 (optional)
USB 2.0 micro B	✓
Measurement	
Measuring ranges	Measuring range 1: -30 to +100 °C Measuring range 2: 0 to +650 °C Manual/automatic switchover
Accuracy	±2 °C, ±2 % of measured value (higher value applies)
Emissivity/reflected temperature adjustment	0.01 to 1 / manual
testo ε-Assist	Automatic recognition of emissivity and determination of reflected temperature (RTC)
Measuring functions	
Analysis functions	Centre point measurement, hot/cold-spot recognition, Delta T, area measurement (min-max on area)
testo ScaleAssist	✓
IFOV warner	✓
Humidity mode – manual	✓
Humidity measurement with humidity measuring instrument ¹⁾	Automatic data transfer of testo 605i thermohygrometer via Bluetooth (instrument must be ordered separately)
Solar mode – manual	Input of solar radiation value
Electrical mode – manual	Input of current, voltage or power
Electrical measurement with clamp meter ¹⁾	Automatic data transfer of testo 770-3 clamp meter via Bluetooth (instrument must be ordered separately)

Imager features	
Digital camera	✓
Lens	42° x 30°
Laser ²⁾	Laser class 2
Video streaming	via USB via WLAN with testo Thermography App
Storage as JPG	✓
Fullscreen mode	✓
Image storage	
File format	.bmt and .jpg; export options in .bmp, .jpg, .png, .csv, .xls
Memory	Internal memory (2.8 GB)
Power supply	
Battery type	lithium ion rechargeable battery exchangeable on site
Operating time	4 hours
Charging options	In instrument/in charging station (optional)
Mains operation	✓
Ambient conditions	
Operating temperature range	-15 to +50 °C
Storage temperature range	-30 to +60 °C
Air humidity	20 to 80 %RH, non-condensing
Housing protection class (IEC 60529)	IP54
Vibration (IEC 60068-2-6)	2G
Physical features	
Weight	510 g
Dimensions (LxWxH)	219 x 96 x 95 mm
Housing	PC - ABS
PC software	
System requirements	Windows 10, Windows 8.1
Standards, tests	
EU Directive	EMC: 2014/30/EU RED: 2014/53/EU

¹⁾ Wireless permit in EU, EFTA, USA, Canada, Australia, Turkey

²⁾ excepting USA, China and Japan

Senze Instruments Pte Ltd

28F Penjuru Close
#01-05 Singapore 609134

T: 65 6878 0600
inquiry@senzeinstruments.com
www.senzeinstruments.com