



Datasheet

5mm Pitch Double Decker Rising Clamp Terminal

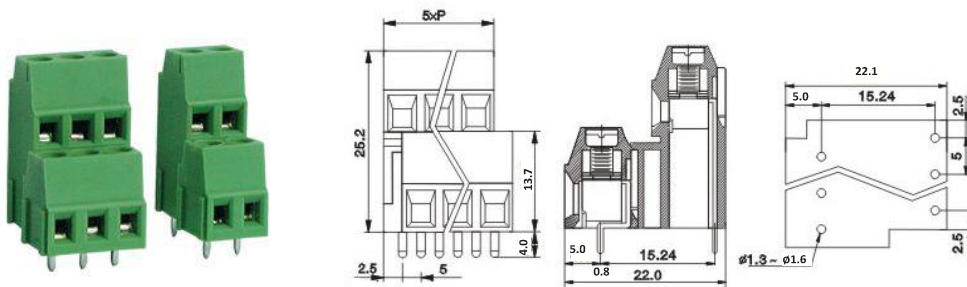

| TYPE NO. | POLES | LENGTH |
|----------|-------|--------|
| 8970910 | 4 | 12.5mm |
| 8970929 | 6 | 17.5mm |

- 4(2x2) & 6(2x3) pole double interlocking mechanism for increased strength
- Double decker
- Moulded in green UL94-V0 flame retardant PA
- Professional rising clamp terminals
- 0.3-3.3 mm² (22-12 AWG)
- Guided pin alignment
-  approved

SPECIFICATION

| | |
|---------------------------|-------------------------------|
| Rating | 10A/300V |
| Insulation Resistance | 5000MΩ/1000V |
| Withstand Voltage | AC2000V/1min |
| Working temperature | -33°C to +120°C |
| Moulding | UL94-V0 flame retardant PA |
| Pin/terminal | Tinned, nickel plated brass |
| Wire clamp | Nickel plated brass |
| Screw/torque | M2.5 steel, zinc plated 0.5Nm |
| Recommended PCB hole size | ø1.3mm |