




ENGLISH

Datasheet

RS PRO SLIM USB-C F-M FRONT MOUNTING FT CONNECTOR

Stock No: 2188312, 2188313

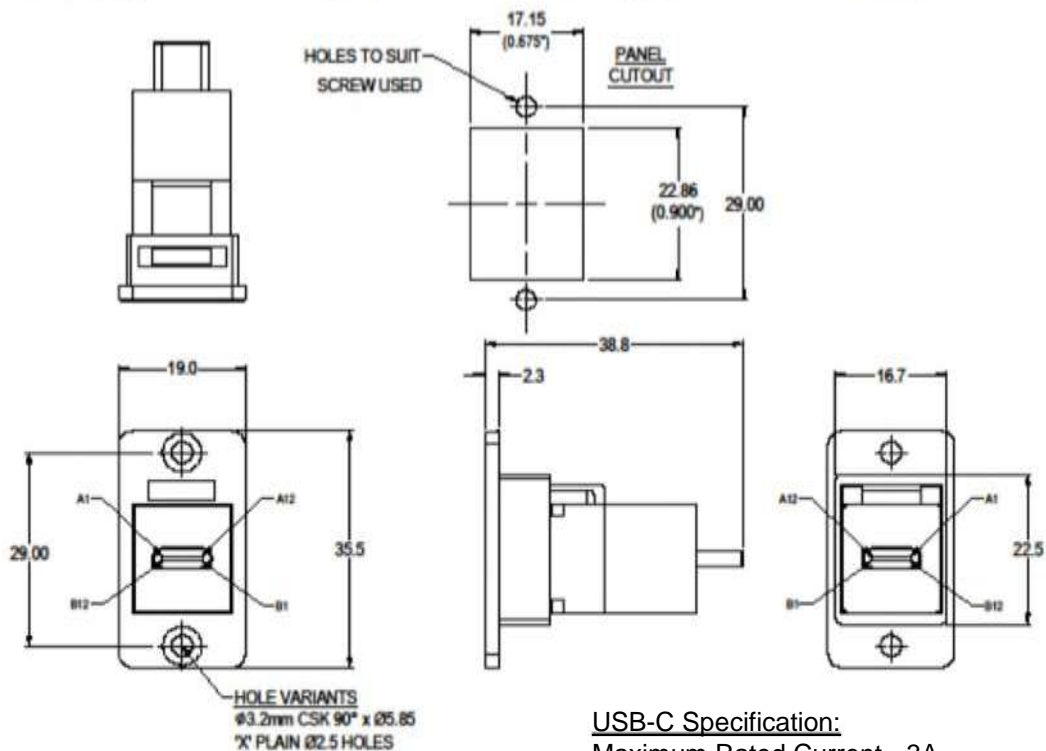

Materials:

- 1.Frame: Polyamide UL94 V2
- 2.Insert: ABS - UL94 HB

rspro.com

USB-C Specification:

- Maximum Rated Current - 3A
- Maximum Working Voltage - 30V
- Withstanding Voltage - 100V for 1 minute.
- Contact Resistance - 40 Milli-ohms Max.
- Insulation Resistance - 100 Mega-ohms
- Min. Insulator Flammability Rating - UL-94V0
- Insertion Life - 10,000 Cycles.

Features & Benefits:

- Fits standard rectangular cutout.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Other models available:

Part No.

2188312 **FM SLIM FT USB-C F-M, Black plastic frame, CSK holes**

2188313 **FM SLIM FT USB-C F-M Black plastic frame, Ø2.5 PLAIN holes**



rspro.com

