

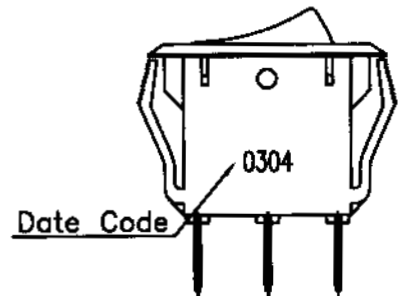
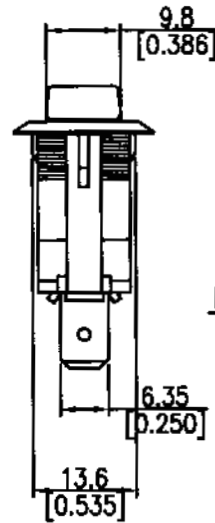


Rating	16A 125VAC 1/3HP 10A 250VAC 1/2HP		Mount Hole	Circuit Structure												
Contact R	50m ohm Max.															
Insulation R	DC 500V 100M ohm Min.															
Dielectric Strength	AC 1500V 1 minute		<table border="1"> <tr> <td>Thickness</td> <td>X</td> <td>Y</td> </tr> <tr> <td>0.75...3</td> <td>27.6-0.1</td> <td>13.8+0.1</td> </tr> <tr> <td>3...4</td> <td>27.8-0.1</td> <td>13.8+0.1</td> </tr> <tr> <td>4...5</td> <td>28.0-0.1</td> <td>13.8+0.1</td> </tr> </table>	Thickness	X	Y	0.75...3	27.6-0.1	13.8+0.1	3...4	27.8-0.1	13.8+0.1	4...5	28.0-0.1	13.8+0.1	
Thickness	X	Y														
0.75...3	27.6-0.1	13.8+0.1														
3...4	27.8-0.1	13.8+0.1														
4...5	28.0-0.1	13.8+0.1														
Circuit	3P SPST ON-OFF (Illuminated)															

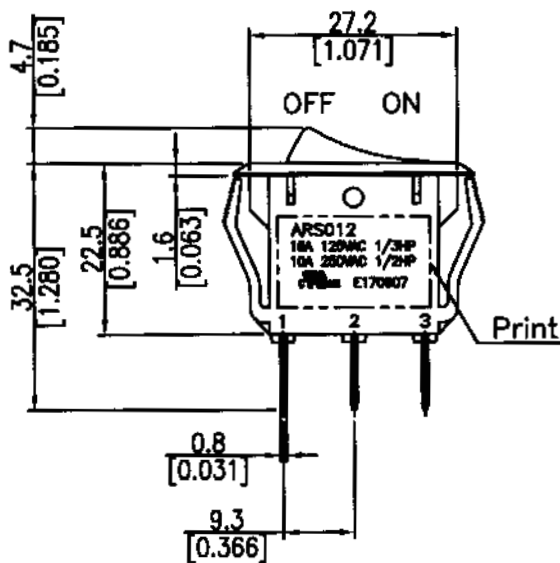

Frame: Nylon 66 (Black)
Actuator: PC (Red)



for E-Z SWITCH only

TOLERANCE: ±0.02

C8\EZ\ARS012

							△	
							△	
Date	Name	Descriptions						NO
Drawing	Check	Approval	SCI No.	1821103	Model Name			
曹盈芳			E-Z P/N	ARS012	Model No.	R13-205B-01		
03/10/04	3/10/04		Unit	mm	SHIN CHIN INDUSTRIAL CO., LTD.			