

Datasheet

RS PRO 250 TYPE NON-INSULATED FEMALE DISCONNECTORS (LOOSE TYPE)

Stock number: **2055292**


MAXIMUM ELECTRIC CURRENT:

A.W.G.	14	12	10
AMP.	30	35	50

TERMINAL MATERIAL: BRASS

TERMINAL SURFACE TREATMENT: NONE

THICKNESS: 0.45MM

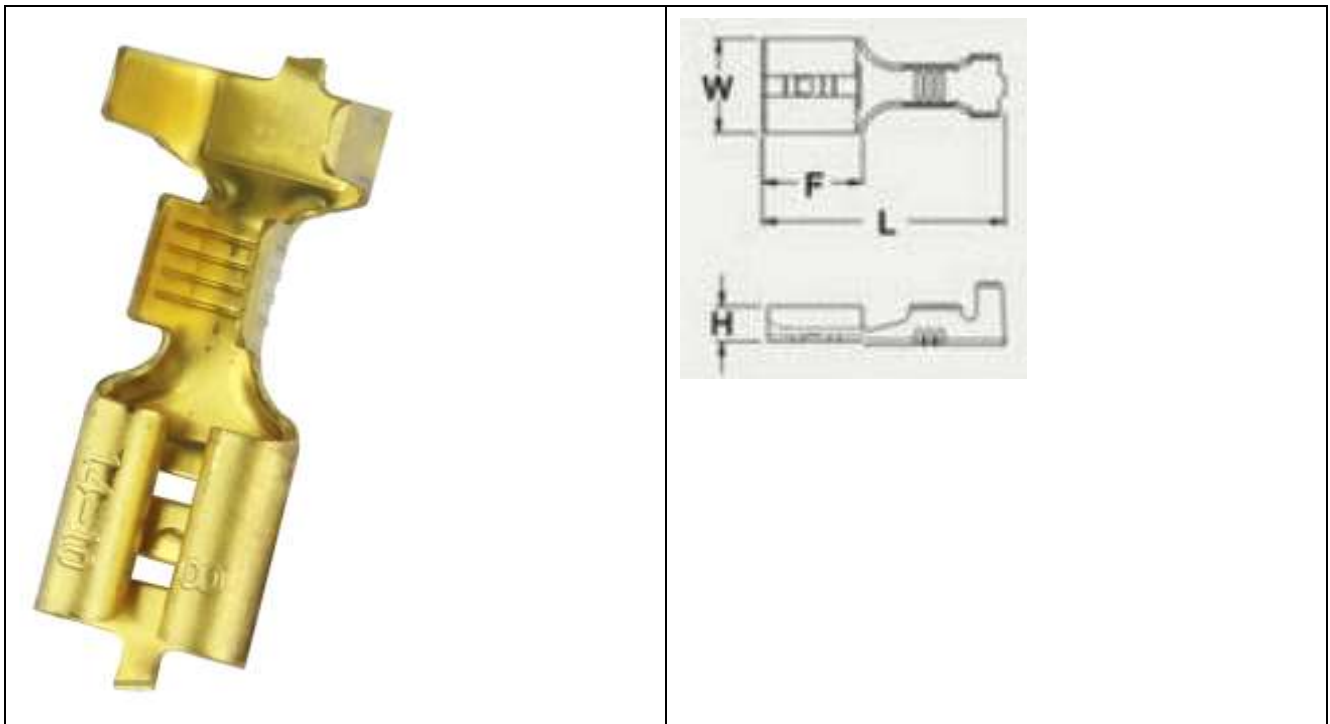

WIRE RANGE A.W.G. mm ²	NEMA TAB (mm)	DIMENSION (mm)					MATERIAL	PLATINGS
		W	F	L	H	T		
14-10 A.W.G. 2.0-6.0 mm ²	.250 x .032 (6.35 x 0.8)	7.6 0	7.7 0	19.7 0	3.1 0	0.45 0	Brass	None

