



## Main

|                               |  |
|-------------------------------|--|
| Range of product              | Harmony XB5  |
| Product or component type     | Emergency switching off push-button<br>Emergency stop push-button  |
| Device short name             | XB5  |
| Bezel material                | Dark grey plastic  |
| Fixing collar material        | Plastic  |
| Head type                     | Standard   |
| Mounting diameter             | 22 mm  |
| Sale per indivisible quantity | 1  |
| Shape of signaling unit head  | Round  |
| Type of operator              | Trigger action and mechanical latching   |
| Reset                         | Turn to release  |
| Operator profile              | Red mushroom Ø 40 mm, unmarked   |
| Contact operation             | Slow-break   |
| Connections - terminals       | Screw clamp terminals, $\leq 2 \times 1.5 \text{ mm}^2$ with cable end conforming to EN 60947-1<br>Screw clamp terminals, $\geq 1 \times 0.22 \text{ mm}^2$ without cable end conforming to EN 60947-1 |
| Device presentation           | Complete product   |

## Complementary

|  |  |
|--|--|
| Height   | 43 mm  |
| Width  | 40 mm  |
| Depth  | 82 mm  |
| Terminals description ISO n°1                            | (11-12)NC  |
| Resistance to high pressure washer                       | 7000000 Pa at 55 °C, distance : 0.1 m  |
| Contacts usage   | Standard contacts  |
| Positive opening   | With conforming to EN/IEC 60947-5-1 appendix K   |
| Operating travel   | 1.5 Mm (NC changing electrical state)<br>4.3 mm (total travel)   |
| Mechanical durability                                    | 300000 cycles  |
| Tightening torque  | 0.8...1.2 N.m conforming to EN 60947-1   |
| Shape of screw head                                      | Cross compatible with Philips no 1 screwdriver<br>Cross compatible with pozidriv No 1 screwdriver<br>Slotted compatible with flat Ø 4 mm screwdriver<br>Slotted compatible with flat Ø 5.5 mm screwdriver  |
| Contacts material  | Silver alloy (Ag/Ni)   |
| Short-circuit protection                                 | 10 A cartridge fuse type gG conforming to EN/IEC 60947-5-1   |
| [I <sub>th</sub> ] conventional free air thermal current | 10 A conforming to EN/IEC 60947-5-1  |
| [U <sub>i</sub> ] rated insulation voltage               | 600 V (pollution degree 3) conforming to EN 60947-1  |
| [U <sub>imp</sub> ] rated impulse withstand voltage      | 6 kV conforming to EN 60947-1  |
| [I <sub>e</sub> ] rated operational current              | 3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>6 A at 120 V, AC-15, A600 conforming to EN/IEC 60947-5-1<br>0.1 A at 600 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>0.55 A at 125 V, DC-13, Q600 conforming to EN/IEC 60947-5-1<br>1.2 A at 600 V, AC-15, A600 conforming to EN/IEC 60947-5-1 |

|                        |   |
|------------------------|---|
| Electrical durability  | 1000000 Cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 Cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C<br>1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5 conforming to EN/IEC 60947-5-1 appendix C |
| Electrical reliability | $\Lambda < 10\exp(-6)$ at 5 V, 1 mA in clean environment conforming to EN/IEC 60947-5-4<br>$\Lambda < 10\exp(-8)$ at 17 V, 5 mA in clean environment conforming to EN/IEC 60947-5-4   |

## Environment

|                                       |   |
|---------------------------------------|---|
| Protective treatment                  | TH  |
| Ambient air temperature for storage   | -40...70 °C   |
| Ambient air temperature for operation | -40...70 °C   |
| Overvoltage category                  | Class II conforming to IEC 60536  |
| IP degree of protection               | IP66 conforming to IEC 60529<br>IP67<br>IP69<br>IP69K   |
| NEMA degree of protection             | NEMA 13<br>NEMA 4X  |
| IK degree of protection               | IK03 conforming to IEC 50102  |
| Standards                             | JIS C8201-5-1<br>EN/IEC 60204-1<br>EN/IEC 60947-5-1<br>EN/ISO 13850<br>CSA C22.2 No 14<br>EN/IEC 60947-5-4<br>EN/IEC 60947-1<br>UL 508<br>IEC 60364-5-53<br>EN/IEC 60947-5-5<br>JIS C8201-1 |
| Product certifications                | GL<br>LROS (Lloyds register of shipping)<br>DNV<br>UL listed<br>CSA<br>BV   |
| Vibration resistance                  | 5 gn (f= 2...500 Hz) conforming to IEC 60068-2-6  |
| Shock resistance                      | 30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27<br>50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27              |

## Packing Units


|                              |           |
|------------------------------|-----------|
| Unit Type of Package 1       | PCE       |
| Number of Units in Package 1 | 1         |
| Package 1 Height             | 5.300 cm  |
| Package 1 Width              | 4.400 cm  |
| Package 1 Length             | 9.000 cm  |
| Package 1 Weight             | 59.000 g  |
| Unit Type of Package 2       | S03       |
| Number of Units in Package 2 | 80        |
| Package 2 Height             | 30.000 cm |
| Package 2 Width              | 30.000 cm |
| Package 2 Length             | 40.000 cm |
| Package 2 Weight             | 5.209 kg  |
| Unit Type of Package 3       | P06       |
| Number of Units in Package 3 | 640       |
| Package 3 Height             | 77.000 cm |

|                  |           |
|------------------|-----------|
| Package 3 Width  | 80.000 cm |
| Package 3 Length | 60.000 cm |
| Package 3 Weight | 51.964 kg |

### Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                              |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>  |
| RoHS exemption information | <a href="#">Yes</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End Of Life Information</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |

Dimensions

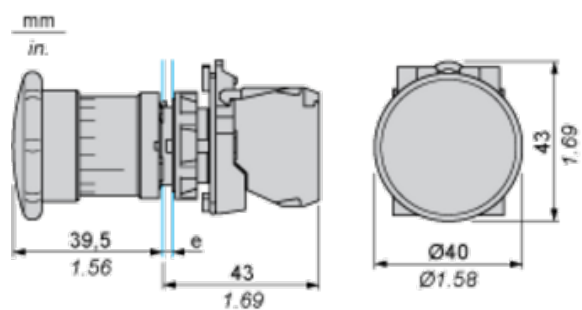

e: clamping thickness: 1 to 6 mm / 0.04 to 0.24 in.

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3)  $\varnothing 22.5$  mm recommended ( $\varnothing 22.3 \text{ }_0^{+0.4}$ ) /  $\varnothing 0.89$  in. recommended ( $\varnothing 0.88 \text{ in. }_0^{+0.016}$ )

| Connections                                   | a in mm | a in in. | b in mm | b in in. |
|---|---------|----------|---------|----------|
| By screw clamp terminals or plug-in connector | 40      | 1.57     | 30      | 1.18     |
| By Faston connectors                          | 45      | 1.77     | 32      | 1.26     |
| On printed circuit board                      | 30      | 1.18     | 30      | 1.18     |

Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3)  $\varnothing 22.5$  mm recommended ( $\varnothing 22.3 \text{ }_0^{+0.4}$ ) /  $\varnothing 0.89$  in. recommended ( $\varnothing 0.88 \text{ in. }_0^{+0.016}$ )