


Datasheet

SINGLE POLE TERMINAL BLOCKS

Indirect clamping

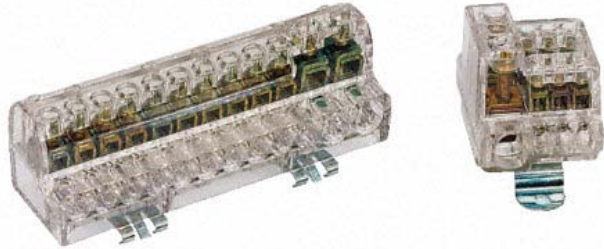

Stock no.	No of ways	Connecting Capacity sqmm	Nominal Voltage V	Maximum Operating Temperature °C	Insulation Specification	Self Extinguishing Specification	Dimensions mm	Weight g
388-2833	12	(10 way) 6	450	85	IP20	V-0 (UL94)	104.5x50xh42	125
315-4920	6	(4 way) 16	450	85	IP21	V-0 (UL94)	83x49xh52	140
388-2811	6	(6 way) 1÷6	450	85	IP22	V-0 (UL94)	23x53xh34	31
315-4807	3	(3 way) 1÷6	450	85	IP23	V-0 (UL94)	23x40xh36.5	18.5
388-2827	8	(6 way) 6	450	85	IP24	V-0 (UL94)	35.5x57xh42	56
315-4841	3	16	450	85	IP25	V-0 (UL94)	38x50xh44	55.5
315-4908	3	35	450	85	IP26	V-0 (UL94)	53x54xh56	114
315-4835	5	(5 way) 1÷6	450	85	IP27	V-0 (UL94)	35x40xh36.5	26.5
315-4863	5	16	450	85	IP28	V-0 (UL94)	61x50xh44	68
D= Version with clamp for DIN rail								