

Features

- 32 selectable tones
- High sound output with a maximum 92dB
- Fully sealed IP65 protection
- Dip switch for controlling volume - 10dB and selectable tones

RS PRO Panel Mount Multi-Tone Electronic Sounders

RS Stock No.: 264-9557



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Get peace of mind with the RS PRO Multi-Tone Alarm Sounder.

- *Easy to install and with 32 selectable tones, you can customise your security system to fit your needs*
- *Quickly switch between primary and secondary tones, keeping your property safe and secure*
- *Choose the perfect audio signal for any application with the RS PRO Multi-Tone Alarm Sounder*

General Specifications

Case Material	ABS
Electrical Connection	Flying Leads
Housing Colour	White
Diameter	50 mm
Number of Tones	32
Weight	0.09 kg

Mechanical Specifications

Operating Temperature	-20 °C - + 70 °C
Connection Type	Flying Leads
Wire Length	200 mm
Hole Cut-Out Size	26 mm

Electrical Specifications

Voltage	9-28 VDC
Current	18 mA (average tone 3)
Sound Output Max.	92 dB

Protection Category

IP Rating	IP 65
-----------	-------

Additional Information


Custom Tariff Number	85311095
----------------------	----------

Approvals

Declarations	CE - UKCA
Standards Met	EN54-3

Similar Products

Stock No.	Brand	Product Name
264-9555	RS PRO	RS PRO Panel Mount Multi Tone Alarm Sounder, 9-28VAC/DC
264-9557	RS PRO	RS PRO Panel Mount Multi Tone Alarm Sounder, 9-28VDC

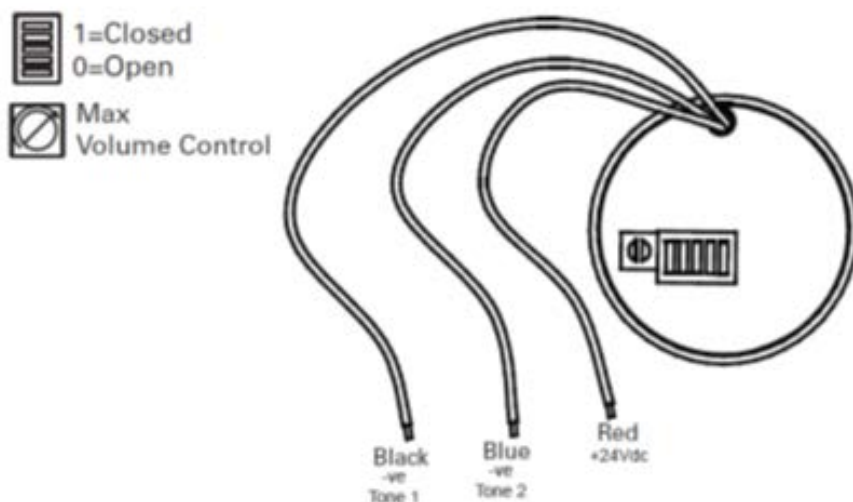

Tones table

			Pattern	Frequency Hz	Rate		Main Application	mA	dB(A)
1	14	11111	Alternating	800 & 970	2Hz (250ms-250ms)		BS Fire tone	12	93
2	14	11110	Sweep	800 to 970	7Hz (7/s)		BS Fire tone	14	97
3	14	11101	Sweep	800 to 970	1Hz (1/s)		BS Fire tone	12	97
4	14	11100	Continuous	2850	Steady		General Purpose	31	98
5	4	11011	Sweep	2400 to 2850	7Hz		General Purpose	36	94
6	4	11010	Sweep	2400 to 2850	1Hz		General Purpose	35	104
7	14	11001	Slow whoop	500 to 1200	3s sweep, 0.5 s silence, then repeat		Dutch fire (NEN 2575)	12	106
8	14	11000	Sweep (DIN)	1200 to 500	1Hz		German fire (DIN 33 404)	15	99
9	4	10111	Alternating	2400 & 2850	2Hz (250ms-250ms)		General Purpose	29	98
10	14	10110	Intermittent	970	0.5Hz (1s On/1s Off)		PFEER alert	10	99
11	14	10101	Alternating	800 & 970	1Hz (500ms-500ms)		BS Fire	12	93
12	4	10100	Intermittent	2850	0.5Hz (1s On/1s Off)		General Purpose	20	94
13	14	10011	Intermittent	970	0.8Hz (250ms On/1s Off)		General Purpose	6	92
14	1	10010	Continuous	970	Steady		PFEER toxic gas	14	93
15	14	10001	Alternating	554 & 440	100ms-400ms		French fire (NFS 32-001)	17	98
16	19	10000	Intermittent	660	3.3Hz (150ms On/150ms Off)		Swedish (Air Raid)	8	95
17	19	01111	Intermittent	660	0.28Hz(1.8s On/1.8s Off)		Swedish (Local warning)	8	96
18	19	01110	Intermittent	660	0.05Hz (13s Off / 6.5s On)		Swedish (Pre-mess)	12	96
19	1	01101	Continuous	660	Steady		Swedish (All clear)	12	96
20	19	01100	Alternating	554 & 440	0.5Hz (1s On/1s Off)		Swedish (Turn out)	16	98
21	14	01011	Intermittent	660	1Hz (500ms-500ms)		Swedish general purpose	8	96
22	14	01010	Intermittent	2850	4Hz (150ms On/100ms Off)		Pelican crossing	20	93
23	14	01001	Sweep	800 to 970	50Hz		BS Fire tone	13	96
24	4	01000	Sweep	2400 to 2850	50Hz		General Purpose	36	104
25	14	00111	Intermittent	970	3 x 500ms pulses, 1.5s silence, then repeat		ISO 8201	9	93
26	14	00110	Intermittent	800 to 970	3 x 500ms pulsed sweep, 1.5s silence, then repeat		ISO 8201	7	98
27	14	00101	Intermittent	970 & 800	3 x 500ms pulsed sweep, 1.5s silence, then repeat		ISO 8201	8	92
28	10	00100	Alternating	800 & 970	2Hz (250ms-250ms)		BS Fire tone	12	93
29	988Hz	00011	Alternating	990 & 650	2Hz (250ms-250ms) (Symphoni tones)		BS Fire tone	22	97
30	510Hz	00010	Alternating	510 & 610	2Hz (250ms-250ms) (Squashni Micro tones)		BS Fire tone	16	96
31	14	00001	Sweep	300 to 1200	1Hz		General Purpose	23	99
32	510Hz	00000	Alternating	510 & 610	1Hz (500mS-500mS)		BS Fire tone	17	96