
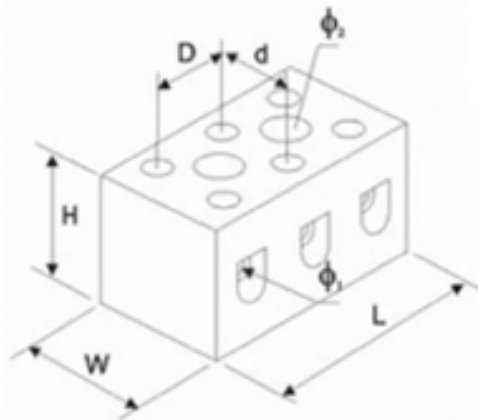


**Datasheet**

# RS Porcelain Terminal Blocks

**SPECIFICATIONS**

INSERTS: NICKEL PLATED BRASS  
 HOUSING: PORCELAIN (GLAZED OPTION)  
 TEMP.: 800°C (HOUSING); 350°C (INSERTS)  
 SCREWS: GALVANISED STEEL  
 STANDARDS: CE (BS EN 60998)  
 COLOUR: WHITE  
 FEATURES: HARD AND SOLID  
 VERY HIGH TEMPERATURE  
 NON-FLAMMABLE  
 RESISTANT TO CHEMICALS

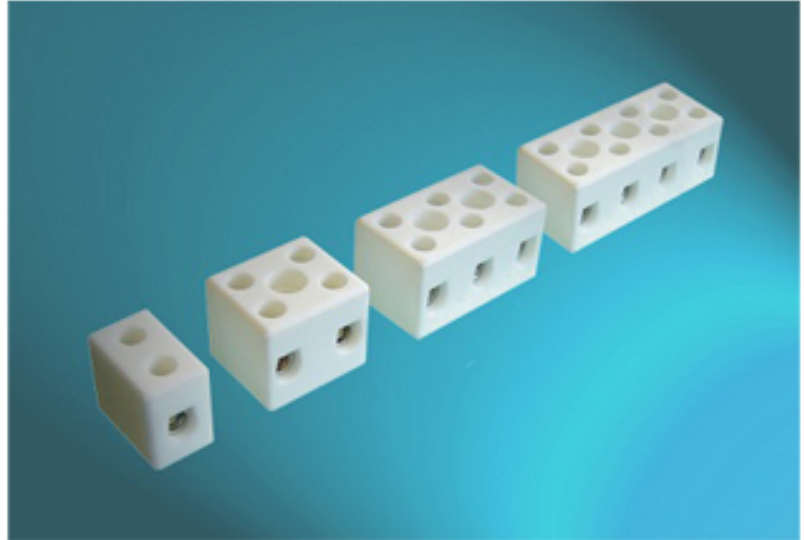

RS Stock No.	CROSS SECTION	CURRENT RANGE	RATED VOLTAGE	DIMENSIONS (mm)						
				W	L	φ1	φ2	D	d	H
813-3098	4 mm <sup>2</sup>	5 - 32 A	450 V	17.8	45.2	3.2	4.8	12	8	16
813-3108	10 mm <sup>2</sup>	15 - 57 A	450 V	20.7	48.6	4.3	4.9	13	10	20
813-3101	16 mm <sup>2</sup>	30 - 76 A	450 V	26.6	64.3	6.1	4.9	17	12.5	21
813-3114	4 mm <sup>2</sup>	5 - 32 A	450 V	13	12	3.2	-	-	8	16
813-3117	10 mm <sup>2</sup>	15 - 57 A	450 V	21	13	4.3	-	-	10	20
813-3111	16 mm <sup>2</sup>	30 - 76 A	450 V	21	15	6.1	-	-	12	22

Cross-section rated for rigid wire and cables (if for flexible wire, it should be reduced one-step, i.e., 6mm<sup>2</sup> is 4mm<sup>2</sup>)

φ1 = wire entry hole diameter

φ2 = fixing hole diameter