

## FEATURES

- 02 METER CABLE
- Zinc Die Casted Dust covers

# RS PRO D-Sub 15-Pin Male to D-Sub 15-Pin Female 2m Cable

RS Stock No.: 2055984



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



## Product Description

RS PRO D-Sub 15-Pin Male to D-Sub 15-Pin Female 2m Cable

Assembled, connection 1: D-SUB socket strip (1x 15-position)

connection 2: D-SUB pin strip (1x 15-position)

## General Specifications

Rated Operational Voltage	60 V
Current Rating	2A
Insulation Resistance	>= 100 MΩ
Temperature Range	-20°C ... +70°C (Fixed Installation)

## Material Specifications

Housing Material	Zinc Alloy, Nickel Platted
Contact	Cu-Zn
Contact Plating	Gold Flash
Contact Carrier	Nylon 66

## Cable Specifications

Cable Length-L	2 m
Cross Section of Wire	24 AWG (0.25 sq. mm)
Cable Dia	7.9 mm ±0.5 mm
Core Dia	1.2 mm ±0.05 mm
Shielding	Yes
	Tinned copper braided shield
Color	Grey

## Connection Data

Connection name	Field Level
Connection Method	D-SUB pin strip
Screw Thread	UNC 4-40
No. of Connections	1
No. of Positions	15
Insertion/withdrawal cycles	>200

## Connection Data 2

## RS PRO D-Sub 15-PIN MALE TO FEMALE CONNECTOR




Connection name	Controller Level
Connection Method	D-SUB Socket strip
Screw Thread	UNC 4-40
No. of Connections	1
No. of Positions	15
Insertion/withdrawal cycles	>200

### Protection Category

Degree of Protection	IP20
----------------------	------

### Additional Information

Custom Tariff Number	85369090
----------------------	----------

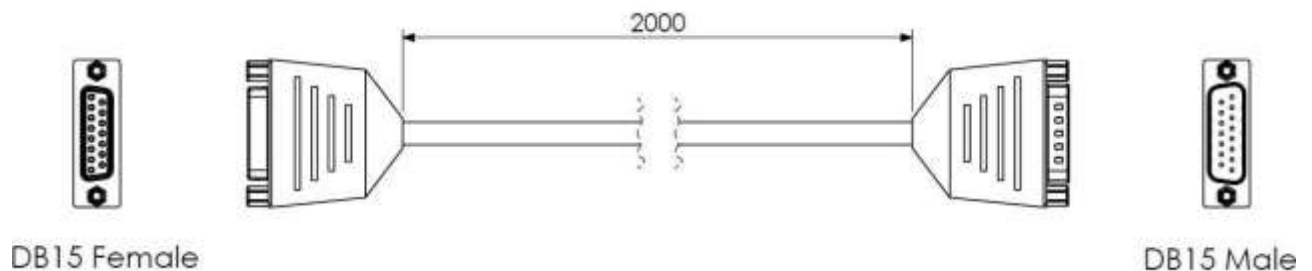

All Dimensions are in mm.