

Datasheet

RS PRO CLEAR TWIN FIGURE 8 CABLE 100M

Stock No: 2075347


**Technical Specifications:**

Conductor	Stranded Tinned Copper
Cores Number	2C
Size(mm²)	0.4
Construction(±0.008mm)	13/0.20
Stranded Dia.(mm)	0.83
Jacket Material	PVC
Jacket Color	Clear With One Black Stripe
Ave Thickness(mm)	0.57
Min Thickness(mm)	0.46
Jacket Dia.(±0.10mm)	2.0×2

Features & Benefits:

- **Rated temperature: 80 °C**
- **Conductor resistance(20°C Ω /km): 46.4Max.**
- **Insulation DC Resistance(20°C $M\Omega$ *Km): 200Min.**
- **Rated Voltage: 60V**
- **Current Rating: 2A**

Cross Section drawings

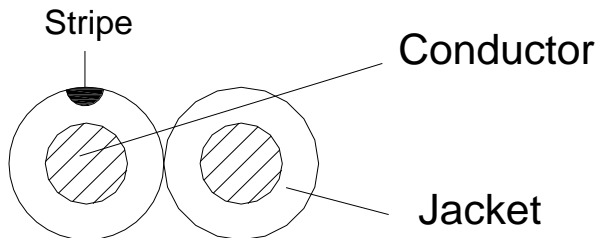

Cable Marking: RS PRO 2 Core \times 0.4mm² Speaker Cable 60V

Applications: Speaker cable is designed specifically to make an electrical connection between speakers and amplifiers, and as such is suited to a number of audio applications. From professional speaker installation to domestic home cinema and hi-fi connections, speaker cable is the most common and effective way to wire speakers in audio setups.