


Datasheet

Feed Through Terminals

RS Stock number 762-2525

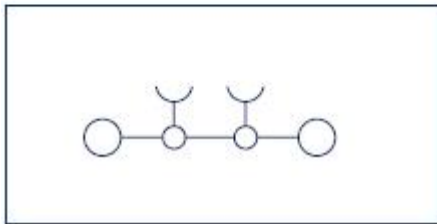

Feed-through terminal
2 connections

Features

- Foot can be snapped on TS 35 DIN rail
- Housing made from polyamide 6.6 UL 94-V0

Specifications:

Rated wire cross-section, mm² | AWG: 16 | 10-6

Rated impulse voltage, kV | Contamination degree: 8 | 3

Plug gauge acc. to EN 60 947-1 | Flamm. class acc. to UL 94: B7 | V2

Connection data

Single wire (solid) / Stranded mm²: 0.2-16 | 0.2-16

Stranded/stranded (w/ferrules acc. to DIN 46 228/1) mm²: 0.2-16 | 0.2-10

Contact wire range, mm²: 0.6-16

Stripping length, mm: 10

Torque, Nm | Screw: 2.0-4.0 | Slotted M 4

Series overview and accessories:

Terminal blocks colour	RS Article
beige 10mm ²	762-2521
blue 10mm ²	762-2525

Accessories	RS Article
End plate AP	872-4726
Partition plate TW	501-746
Insulating cap SQIK for cross-connector	872-4739
Insulated cross-connection SQI 2 pole	762-2587
Insulated cross-connection SQI 3 pole	872-4773
Insulated cross-connection SQI 5 pole	762-2590
Insulated cross-connection SQI 10 pole	762-2593

Note: Cross connectors can be used overlapping

Fitting DIN Rails	RS Article
35mm Din Rail, slotted, 500mm	467-406
35mm Din Rail, slotted, 1000mm	467-416
35mm Din Rail, slotted, 2000mm	742-4138
35mm Din Rail, not slotted, 500mm	742-4129
35mm Din Rail, not slotted, 1000mm	467-399
35mm Din Rail, not slotted, 2000mm	467-400