


## Datasheet

### Earth Modular Terminal Block

RS Stock number 872-4791

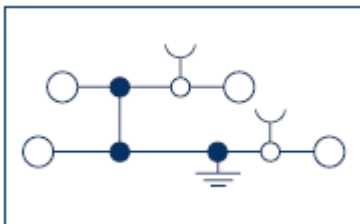

Protective earth terminal  
4 connections

### Features

- Foot can be snapped on TS 35 DIN rail
- Housing made from Polyamide 6.6 UL 94-V0

### Specifications:

Rated Wire cross-section, mm<sup>2</sup>|AWG: 2.5 | 30-12

Rated impulse voltage, kV|Contamination degree: 8|3

Plug gauge acc. to EN 60 947-1|Flamm. class acc. to UL 94: A3 | V0

#### Connection data

Single wire (solid)|stranded (flexible), mm<sup>2</sup>: 0.2-4 | -

Finely-stranded|finely-stranded (w/ferrules DIN 46 228/1), mm<sup>2</sup>: 0.2-4 | 0.2-2.5

Contact Wire Range, mm<sup>2</sup>: 0.2-4

Stripping length, mm: 10

Torque, Nm|Screw: 0.4-0.8 | Slotted M 2.5