




ENGLISH

Product Datasheet

SCSI III male-male cable connector,2m


RS Stock No. 2338830

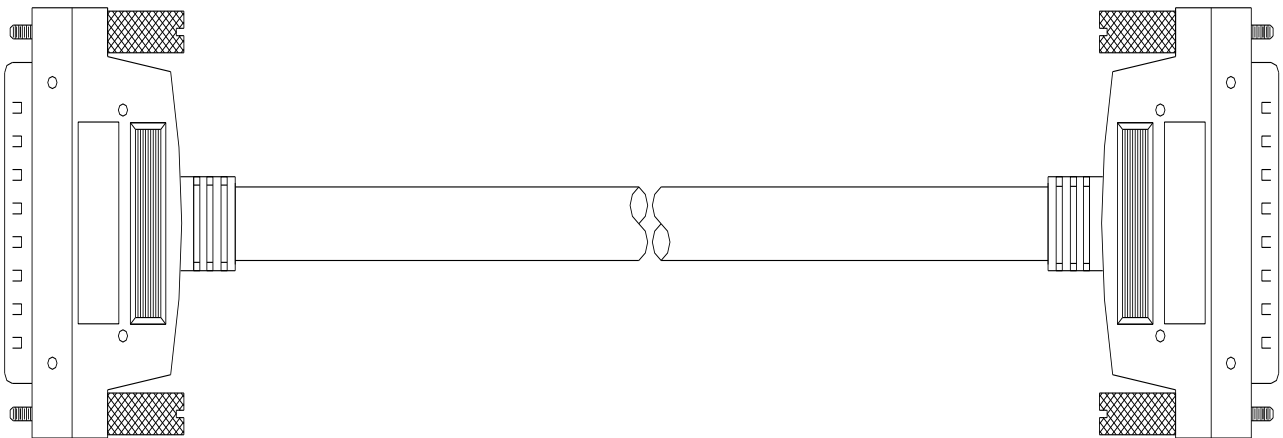


PRODUCT MATERIAL

1. HPDB68 Male, 10u"Gold Plated, Shell: Tin Plated, Insulation: Black, PBT UL94V-0.
2. UL2990 28AWG 34TW/PR, Al/Mylar+Drain+Braid, Color: Beige.
3. Overmolded PVC, Color: Beige.

SPECIFICATION

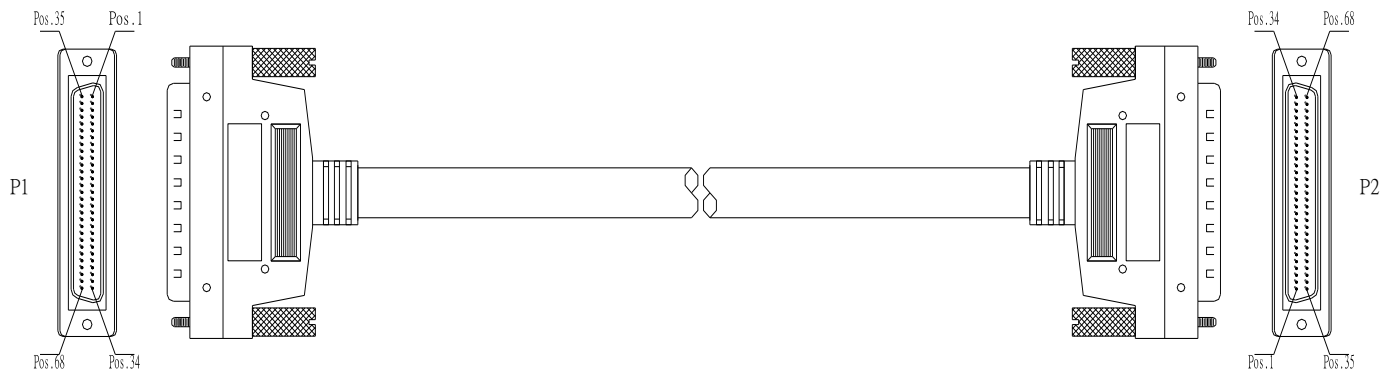

PIN ASSIGNMENT:

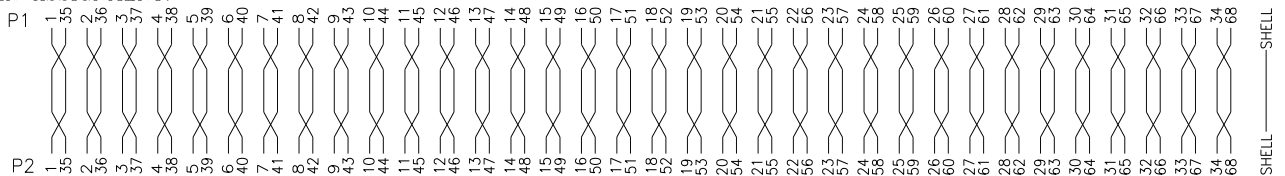

ELECTRICAL TESTING:

Specifications

Shielding	100% of Mylar Foil
Current Rating	500mA max
Operating voltage	30V max
Temperature Rating	80°C
Contact Resistance	15m ohm max
Mating Cycles	500

Note:

1 pc / PE bag

2016/09/01