



Datasheet

RS PRO Hermetically Sealed Enclosures

Stock number: 1862283

EN





Product Details

Hermetic enclosure ideal for applications requiring protection against water ingress. The enclosure is manufactured with polyurethane gascet that provides IP67 rating. Lid manufactured with recess for mambrane keypads and overlays. Threaded brass inserts ensures reliable assembly of the enclosure.

Features and Benefits

- · Lid made of PC, base made of ABS
- Available in light gray color
- Protection against liquids and solid objects: IP67 rating
- Protection against mechanical impacts: IK07 rating
- Supplied with silicon gasket and four screws
- Lid with recess for keypads and overlays
- Threaded brass inserts for reliable assembly.





| Category | Hermetically sealed Enclosures |
|------------------------|---|
| Туре | Full |
| Material | PC, ABS |
| Variant | Hermetic (with polyurethane gascet) (S) |
| Height | 60.0 mm |
| Width | 135.0 mm |
| Length | 135.0 mm |
| Color | Lightgray (J) |
| Protection level | IP67 |
| Shock protection level | IK07 |
| Standard Met | RoHS Compliant |
| Accessories | Screw M3/20: 4 pcs |
| Certificate number | CE/001/19 |














Max PCB size

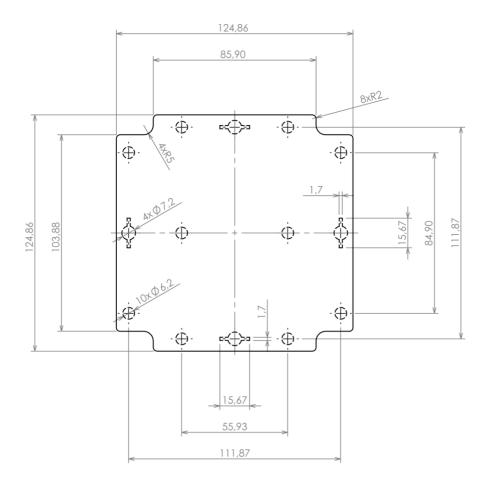

Dashed line shows outline of the mounting boss under PCB board Recommended mounting holes diameter ø4mm



