



Features


- 100 watts at 25°C case temperature heat sink mounted
- TO-247 style power package
- Single M3 screw mounting to heat sink
- Molded case for protection and easy to mount
- Electrically isolated case
- Non-Inductive design

**RoHS
Compliant**

Applications


- Gate Resistors in Power Supplies
- Snubbers
- Load and Dumping Resistors in CRT Monitors
- Terminal Resistance in RF Power Amplifiers
- Voltage Regulation
- Low Energy Pulse Loading
- UPS

Construction

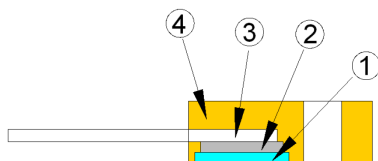


1	Alumina Substrate
2	Resistor Layer
3	Lead
4	Molding

Dimensions

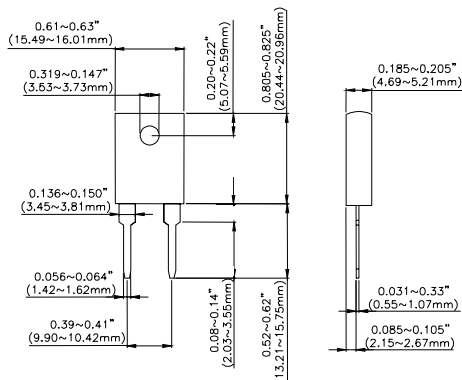

Derating Curve

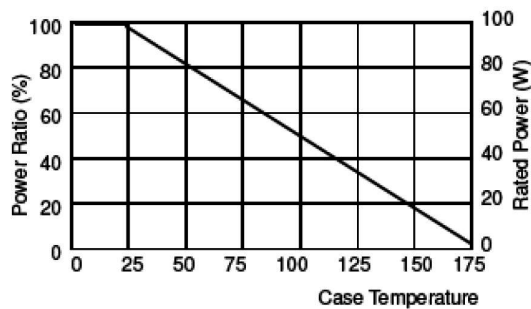

Dimensions : Inches (Millimetres)

Electrical Characteristics Specifications

Type	Item	Resistance Range			TCR (PPM/°C)
		±1%	±5%	±10%	
MCTR100	-	0.05Ω – 1Ω			No Specified
	-	>1Ω – 3Ω			±300
	-	>3Ω -10Ω			±100 ±200

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

Electrical Characteristics Specifications

Type \ Item	Resistance Range			TCR (PPM/°C)
	±1%	±5%	±10%	
MCTR100	>10Ω -100kΩ			±50 ±100 ±200

Operating Voltage : 700V Max.
 Dielectric Strength : 1,800V AC
 Insulation Resistance : 10GΩ min.
 Working Temperature Range : -65°C to +175°C

Environmental Characteristics

Item	Requirement	Test Method
Temperature Coefficient of Resistance (T.C.R.)	As Spec.	Referenced to 25°C, ΔR taken at +105°C
Load Life	ΔR ±1%	Rated power, 2,000 hours
Solderability	90% min. Coverage	245 ±5°C for 3 seconds
Momentary Overload	ΔR ±0.5%	1.5 times rated power and V (DC) ≤1.5VMax. for 5 seconds
Dielectric strength	ΔR ±0.15%	1800V AC, 60 seconds
Moisture resistance	ΔR ±0.5%	-10°C ~ +65°C, RH>90%, cycle 240 hours
Thermal Shock	ΔR ±0.5%	-65°C ~150°C, 100 cycles
Terminal Strength	ΔR ±0.2%	(Pull Test) 2.4N
Vibration, High Frequency	ΔR ±0.4%	20g peak

Lead Material: Tinned Copper; Maximum Torque: 0.9 Nm

When in Free Air at 25°C, the MCTR100 is Rated for 3.5W

The case temperature is to be used for the definition of the applied power limit. The case temperature measurement must be made with a thermocouple contacting the centre of the component mounted on the designed heat sink

Thermal grease should be applied properly

Part Number Explanation

MCTR	100	J	D	D	0100
Series Type	Power	Resistance Tolerance	Packaging Code	TCR (PPM/°C)	Resistance
	100: 100 Watts	F: ±1% J: ±5% K: ±10%	B: Bulk D: Tube	D: ±50 E: ±100 F: ±200 G: ±300 - : No Specified	R100: 0.1Ω 0100: 10Ω 4700: 470Ω 1001: 1000Ω 1002: 10000Ω

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.