


NO	DESCRIPTION	DATE
①	BACKGROUND FORMAT UPDATED	07.04.02'
②	BACKGROUND FORMAT UPDATED	03.01.10'
③	ADD VOLTAGE RATING J VSWR	01.23.14'

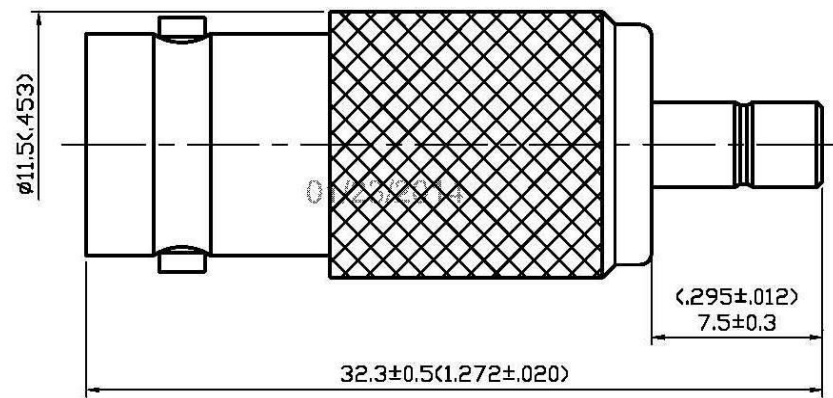

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 VOLTAGE RATING: 335 VOLTS MAX. ③
- 1.4 VSWR: 1.3 MAX. ③

2.0 MATERIALS ③

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.

4.0 MECHANICAL

4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
5	CHASSIS	BRASS	1	GOLD 3μ" MIN.
4	INSULATION	TEFLON	1	NONE
3	CENTER CONTACT	BRASS	1	GOLD 30μ" MIN.
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	GOLD 3μ" MIN.

APPROVED by _____ DATE: _____



DESCRIPTION		STRAIGHT SMB JACK-BNC JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	24-26 T.G.G		日期	DATE	版次	REV.
	Kristina			\ ROHS COMPLIANT (50Ω)					
檢圖	CHECK	UNIT	單位	DWG.NO. 24-0042					
	Arc			mm(In)					
認定	APPROVAL	SCALE	比例	4:1					
	Angela			ANGLE ±5°					