


NO	DESCRIPTION	DATE
⚠	-20° C TO +80° C	01.21.13'
	→ -65° C TO +165° C	
	RUBBER → SILICONE	

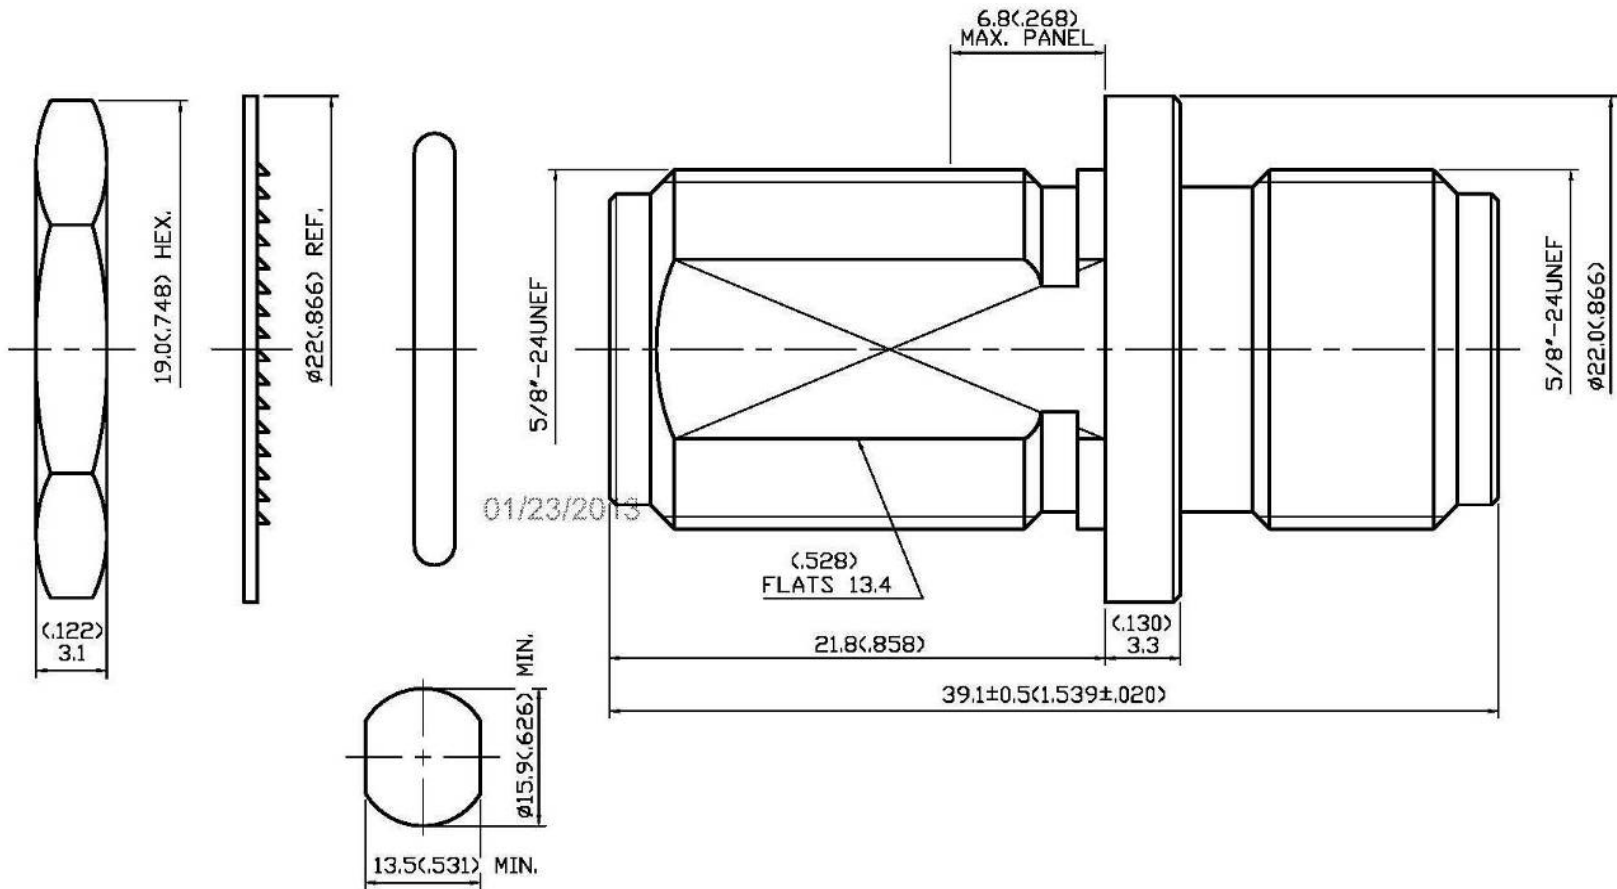

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-11 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHM
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.
- 1.4 VSWR: 1.4 MAX. @3 GHz

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 MECHANICAL

- 4.1 INTERFACE IN ACCORDANCE WITH: MIL-STD-348A

### 5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -65° C TO +165° C ⚠
- 5.2 CONNECTOR MUST WITHSTAND WATERPROOF LEAK TEST PRESSURE 7kg/cm<sup>2</sup> MIN.

MOUNTING HOLE  
SCALE 1.5:1

APPROVED

by

DATE:

NO	DESCRIPTION	MATERIAL	Q'TY	FINISH
7	NUT	BRASS	1	NICKEL
6	WASHER	BRASS	1	NICKEL
5	O-RING	SILICONE	1	BLACK
4	HERMETICALLY SEALED	—	1	NONE
3	BODY	BRASS	1	NICKEL 100μ" MIN.
2	SLEEVE	BRASS	1	NICKEL 100μ" MIN.
1	CENTER CONTACT	BRASS	2	GOLD 30μ" MIN.



DESCRIPTION		HERMETICALLY SEALED N STRAIGHT BULKHEAD JACK- JACK ADAPTER							
製圖	DRAWN	TOLERANCE	品名	11-23-1	x.G.N	日期	DATE	版次	REV.
	Yoko	X ±0.2	TITLE	\ROHS COMPLIANT (50Ω)		08.12.02'		B-1	
檢圖	CHECK	XX ±0.1	單位	UNIT					
	Ivan	XXX ±0.05	mm(in)	DWG.NO.		11-0249			
認定	APPROVAL	ANGLE ±5°	比例	SCALE					
	Angela		4:1						